




The Americana Collection
GOLIATH
 Indoor/Outdoor — LED

BONUS

You can also choose from existing Americana models —see following page for all available styles.

TO SPECIFY: Series – Size – Style ***
GO-S-CR [Carmi]

***Diffuser Shape predetermined by model design
 —Consult Factory for Custom Requirements

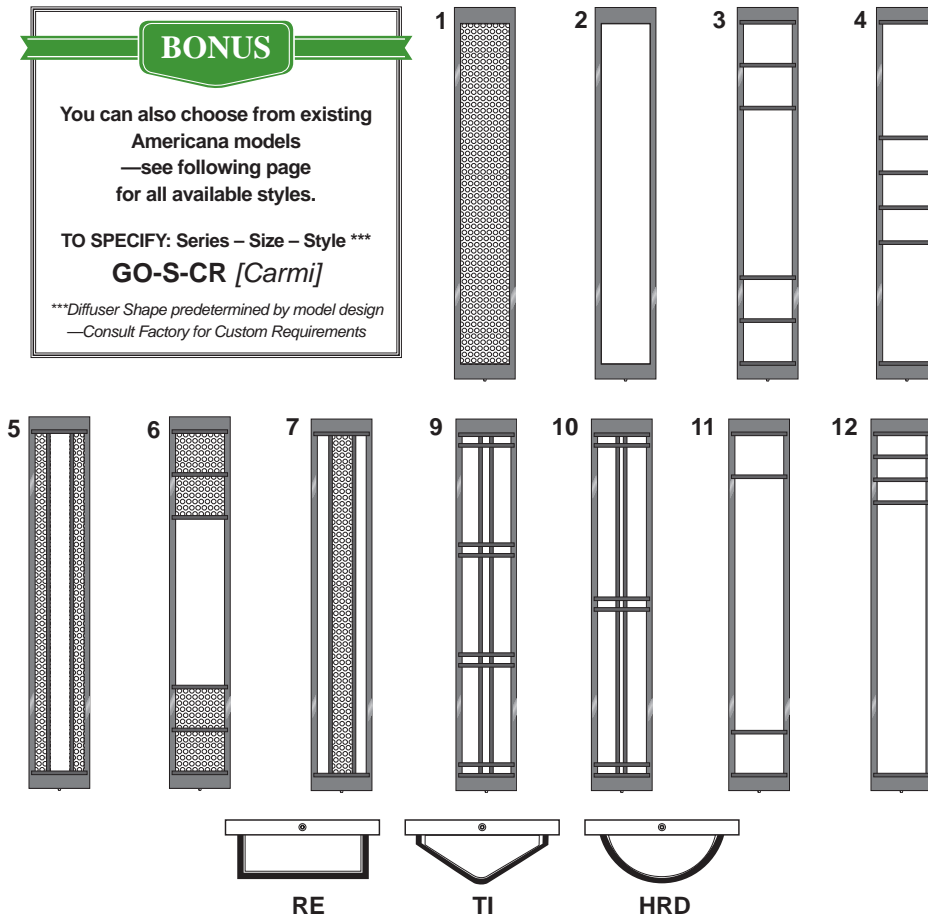

LED / SIZE WATTAGES			
Consult Factory on Wattage Restrictions for Models with Perflex [PF] or Solid Shield [SSD]			
SIZE	DIMENSIONS	LED	LU (LED Uplight) / LD (LED Downlight)
S	8" x 38" x 4"	25w	[1 or 2] 25w
L	8" x 51" x 4"	50w	[1 or 2] 25w

Catalog Number	
Project Name & Location	Type



Product Specifications

DRIVER: Universal Voltage 120-277V.
BACKBOX: [CA] Back box Conduit Adapter 16 ga. aluminum. Wire access through .875" dia. KO on four sides and back. Required for exterior, uneven surface applications.
BACKPLATE: 16 gauge aluminum
CAGE: Standardized .375" or .5" square extruded aluminum bars secured by hidden means to the frame. Standard configurations shown; custom spacing available. Optional [PF] perforated aluminum insert.
DIFFUSER: Translucent white non-yellowing 100% virgin acrylic. Fully enclosed. Clear top and bottom [CLTB] is Standard with Uplight or/and Downlight. Optional Opaque top, bottom or both [OTB]. Optional Open [OPTB] top and/or bottom — Indoor Only. Optional Aluminum Solid Shield Top/Bottom (No Light).

GASKETING: High temperature and non-aging neoprene rubber and/or black EPDM completely around the perimeter of the lens and around the rear wire entrance hole. Protects against dust, moisture and outside contamination.
LENS FASTENERS: 2 Stainless steel tamperproof screws.
MOUNTING: Access hole in center for indoor mounting to a J-BOX. For indoor/outdoor use .25" diameter bolts in 4 holes, .3125" diameter.
PAINTED FINISH: Pre-treated highly durable oven baked polyester powder finish. Corrosion and Weather resistant.
COMPLIANCE: Built according to U.S. and Canadian Safety Standards. Suitable For Wet Location.

order example:
GO-S-HRD-11-LED25-CT3-UNV-PA

SERIES	GO Goliath Series
SIZE	S Small: 8" [A] x 38" [B] x 4" [C] — ADA L Large: 8" [A] x 51" [B] x 4" [C] — ADA
SHAPE	HRD Half-Round Diffuser RE Rectangular Diffuser TI Triangular Diffuser
STYLE	Choose any model 1 through 12 [see illustrations]. Style 8 = Custom Cage Design—design your own cage. You can also choose from existing Americana models—refer to the following page for available styles.
LED WATTAGE	Select from the LED / Size Wattages Table
LED COLOR TEMPERATURE	CT3 ±3000K LED Color Temp CT4 ±4000K LED Color Temp CT5 ±5000K LED Color Temp
VOLTAGE	120 120 Volts 277 277 Volts 347 347 Volts UNV 120-277 Universal Volt Electronic Driver (Standard) 2UNV Two 120-277 Universal Volt Electronic Drivers
OPTIONS	0-10D 0-10V Low Voltage LED Dimming CA Aluminum Backbox/Surface Conduit [2" deep] CLTB Clear Top & Bottom [Std with Up/Downlight] CM Ceiling Mount (Consult Factory) CU Custom Requirements EM Emergency Battery (Self-contained in CA) — Damp Location — Must Specify Voltage [120V or 277V]; — Consult Factory for EM Options FUS Fuse and Fuseholder DFUS Dual Fuse and Fuseholder GN Generator Transfer Device H/L1 High/Low LED Light Level — Single AC-Input Feed / Switch Sensor (Required) H/L2 High/Low LED Light Level — Wired for Dual AC Input Feeds HOR Horizontal Mount (Consult Factory) MD Integral Motion Detector — Specify "A" for Single Circuit: All-On / All-Off — Specify "B" for Single Circuit: Half-On / Half-Off MDX External Motion Detector — Specify "A" for Single Circuit: All-On / All-Off — Specify "B" for Single Circuit: Half-On / Half-Off White (WHT) or Bronze (BZ) Finish OTB Opaque Top & Bottom OPTB Open Top & Bottom [Indoor Only] PF Perforated Aluminum Insert PHT1 Integral Photocell 120V [Requires CA] PHT7 Integral Photocell 277V [Requires CA] PHTD Integral Photocell Dual Voltage 120/277V [Requires CA] REM Remote Emergency Battery (Self-contained in CA) — Must Specify Voltage [120V or 277V]; — Consult Factory for REM Options SSD Aluminum Solid Shield (No Light) TPD Tamperproof Screwdriver
FINISH	BK Black BZ Bronze CC Custom Color [Specify RAL#] PA Painted Aluminum SV Silvadillo Gray WHT White