



The Americana Collection

SENECA

Indoor/Outdoor — LED



B1 Single Band




B2 Bands




B3 Bands

DIMENSIONS


2-FOOT



3-FOOT

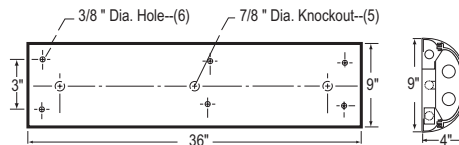

4-FOOT

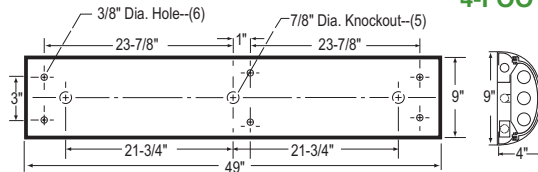

Catalog Number

Project Name & Location

Type



Product Specifications

DRIVER: Universal volt (120-277v) electronic. Optional Step Dimming Driver.

EMERGENCY: Integral Emergency Battery (EM) / Remote Emergency Battery (REM).

HOUSING: Heavy gauge extruded aluminum with cast aluminum end caps with decorative bands. Includes knockouts for surface conduit and tandem mounting. Optional back box for emergency battery backup operation available.

REFLECTOR: Formed aluminum with multiple bends for maximum rigidity and unitized with all electrical components.

FINISH: All metal parts are 5 stage pre-treated and finished in white polyester powder coat. Natatorium Coating (NAT) optional.

LENS: .130" thick U.V. stabilized "Satinized" Polycarbonate Lens (SPL) is Standard with no LED Striations.

LENS FASTENERS: Recessed Allen set screws to secure lens in place (2) each side (4) total.

LIGHT ENGINE: Light Emitting Diode (LED). Optional protective coating (NAT).

COMPLIANCE: Built to comply with U.S. and Canadian Safety Standards. Suitable For Wet Location Covered Ceiling. Wall Mount — Damp Location (requires PSH option to maintain Wet Listing). ADA Compliant. IP65 Tested and Rated.

order example:

SN-4-B2-LED40-CT4-UNV-WHT-SU

SERIES

SN Seneca Series

SIZE

- 1 13" Length x 9"W x 4" Depth (ADA Compliant)
- 2 25.5" Length x 9"W x 4" Depth (ADA Compliant)
- 3 37" Length x 9"W x 4" Depth (ADA Compliant)
- 4 49" Length x 9"W x 4" Depth (ADA Compliant)

BANDS

- B1 Single Band / Window
- B2 Groups of 2 Bands
- B3 Groups of 3 Bands

LED WATTAGES (Available Per Size)

*100w Requires Conduit Adapter Back Box Option (CA)

- Size 1 15w / 20w / 25w / 30w
- Size 2 15w / 20w / 25w / 30w / 40w
- Size 3 15w / 20w / 25w / 30w / 40w / 50w / 60w
- Size 4 20w / 25w / 30w / 40w / 50w / 60w / 80w / *100w

LED COLOR TEMPERATURE

- CT3 ±3000K LED Color Temp
- CT35 ±3500K LED Color Temp
- CT4 ±4000K LED Color Temp
- CT5 ±5000K LED Color Temp
- CT65 ±6500K LED Color Temp

VOLTAGE

Note: 0-10V Low Voltage Dimming Comes Standard for All Drivers except 347V.

- 120 120 Volts
- 277 277 Volts
- 347 347 Volts
- UNV 120~277 Universal Volt Electronic Driver
- 2UNV Two 120~277 Universal Volt Electronic Drivers

FINISH

- BK Black
- BZ Bronze
- CC Custom Color (Consult Factory)
- NAT Natatorium Coating (Consult Factory)
- WHT White

OPTIONS

- 8DIM LED Dimming: Forward Phase (Triac)
- 13DIM LED Step Dimming
- CA Aluminum Backbox/Surface Conduit [2" deep]
- FUS Fuse and Fuseholder
- DFUS Dual Fuse and Fuseholder
- GN Generator Transfer Device
- H/L2 High/Low LED Light Level
— Wired for Dual AC Input Feeds
- HOR Horizontal Mount (Consult Factory)
- MD Internal Motion Detector (Single Circuit)
— Specify "A" for Steps: 0% - 100% - 0%
— Specify "B" for Steps: xx% - 100% - xx%
— Specify "C" for Steps: 0% - xx% - 100%
xx% = LOW Level and/or STANDBY Dim Levels
Options: 50% / 30% / 20% / 10%
Note: Max Mounting Height is 10 Feet
- SU 10KA Surge Protection for LED fixtures
— Meets ANSI spec C62.41.2

EMERGENCY BATTERY OPTIONS

- Standard EM / REM Meets CEC/Title 20 Standards
- Cold Weather is Non-CEC Compliant
- CA Option Required for Integral EM (Consult Factory)

- EM4W Integral LED 4 Watt
- EM8W Integral LED 8 Watt
- EM10W Integral LED 10 Watt
- EM16W Integral LED 16 Watt

- REM10W- Remote LED 10 Watt - Cold Weather
CW — Operating Temp: -20°C to 50°C