




# The Americana Collection VISTA 2 (Selectable Wattage/CCT Series)

High Abuse Wall Sconce — Selectable Wattage / CCT

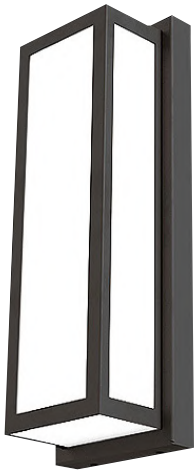

Rectangular Windows  
(RW)



Front Facing  
Perfix Window (PX)



Solid Front Window  
(SF)



## order example:

VS2-RW-SLED-SCCT-BK-OCC-CA14

### SERIES

VS2 Vista 2 Series

### WINDOW / FASCIA STYLE

RW Rectangular Window  
PX Front Facing Perfix Window  
SF Solid Front (No Window)

### LED WATTAGE

**Note: Refer to Chart for Wattage / Lumen Output**

SLED \*Selectable LED Wattages: 18W | 20W | 22W

### LED COLOR TEMPERATURE (CCT)

SCCT \*Selectable CCT: 3000K | 4000K | 5000K

### VOLTAGE

UNV 120-277 Universal Volt Electronic Driver  
- TRIAC Dimming is Standard

### STANDARD FINISH

BK Black  
BZ Bronze  
PA Painted Aluminum  
WHT White

### PREMIUM UPCHARGE FINISH

CC Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))  
- Provide RAL# for Make-to-Match Color Chip

### PHOTOCELL OPTION

PHOT Photocell

### SENSOR OPTIONS (Sensor Integral to Fixture)

OCC Occupancy Sensing / Motion Sensor Integral  
- Requires Conduit Back Box (CA)

### MISC OPTION

TP Torx Tamperproof Screws

### CONDUIT ADAPTER OPTION

CA14 14"H x 5"W x 1.5"D Conduit Adapter Back Box

### ACCESSORY OPTIONS


#### Order As A Separate Line

9008 T8 Torx Security Bit for Screwdriver

**\*NOTE:** Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.

## Selectable Wattage / Lumen Output

Low Power	Medium Power	High Power
18 Watt (2160 Lumens)	20 Watt (2400 Lumens)	22 Watt (2640 Lumens)

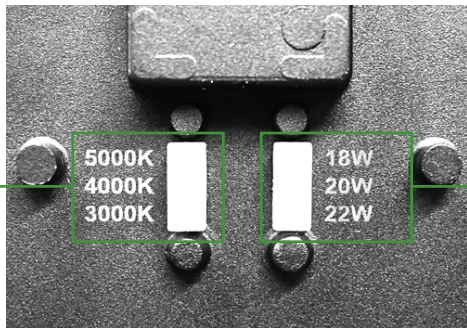

Selectable CCT Switch  
3000K | 4000K | 5000K

Selectable  
Wattage Switch  
18W | 20W | 22W

Selectable Wattage / CCT Switches  
Located on Back of Fixture

Catalog Number

Project Name & Location

Type

## Product Specifications

**DRIVER:** Universal Voltage 120/277v Electronic Driver with TRIAC Dimming.

**FINISH:** Corrosion Resistant Polyester Powder Coated Finish.

**HOUSING:** Die Cast Aluminum Housing.

**LENS:** Anti-Yellowing and High Transmission Polycarbonate Diffuser.

**LIGHT ENGINE:** Energy Efficient Light Emitting Diode (LED) - Selectable Wattage / CCT.

Wattages: 18W, 20W or 22W / CCT: 3000K, 4000K or 5000K.

**LED LIFETIME:** ≥50,000hrs.

**MOUNTING:** Mounts to standard 3" and 4" recessed junction boxes via mounting strap. Can also be 4-point mounted via supplied mounting screws.

**OPERATING AMBIENT TEMPERATURE:** -20°C to +40°C (-4°F to 122°F)


**COMPLIANCE:** Built to comply with U.S. and Canadian safety standards. RoHS and ADA Compliant. Made in USA. IP66 Rated, suitable for wet location.

**WARRANTY:** 5-Year Limited Warranty.



# The Americana Collection VISTA 2 (Static Wattage/CCT Series)

High Abuse Wall Sconce — Static Wattage / CCT | Optional Emergency Battery

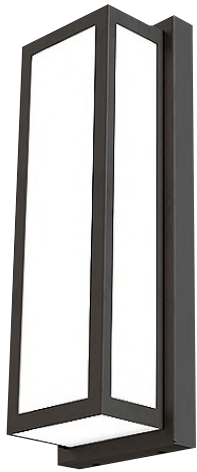

Rectangular Windows  
(RW)



Front Facing  
Perfix Window (PX)



Solid Front Window  
(SF)



## order example:

VS2-RW-LED15-CT4-BK-CA14-EM10W

### SERIES

VS2 Vista 2 Series

### WINDOW / FASCIA STYLE

RW Rectangular Window  
PX Front Facing Perfix Window  
SF Solid Front (No Window)

### LED WATTAGE

LED10 10 Watt LED  
LED15 15 Watt LED

### LED COLOR TEMPERATURE (CCT)

CT3 ±3000K LED Color Temp  
CT35 ±3500K LED Color Temp  
CT4 ±4000K LED Color Temp  
CT5 ±5000K LED Color Temp

### VOLTAGE

UNV 120~277 Universal Volt Electronic Driver  
– 0-10V Dimming (100-10%) is Standard

### STANDARD FINISH

BK Black  
BZ Bronze  
PA Painted Aluminum  
WHT White

### PREMIUM UPCHARGE FINISH

CC Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))  
– Provide RAL# for Make-to-Match Color Chip

### PHOTOCELL OPTION

PHOT Photocell  
– Requires Conduit Back Box (CA)

### SENSOR OPTIONS (Sensor Integral to Fixture)

Note: Cannot be used with Manual Controls Above

OCC Occupancy Sensing / Motion Sensor Integral  
– Requires Conduit Back Box (CA)

### MISC OPTION

TP Torx Tamperproof Screws

### CONDUIT ADAPTER OPTION

CA14 14"H x 5"W x 1.5"D Conduit Adapter Back Box

### EMERGENCY BATTERY OPTIONS

- Emergency Battery Options Meet California Energy Commission Title 20 [CEC-400-2014-009-CMF] Efficiency Standands (Cold Weather is NON-CEC)
- Cold Weather Emergency Batteries Temp Range: -20°C thru 50°C
- Emergency Batteries Require Conduit Adapter (CA Option)

EM10W Integral 10 Watt LED

EM10W- Integral 10 Watt LED - Cold Weather  
CW

### ACCESSORY OPTIONS

Order As A Separate Line

9008 T8 Torx Security Bit for Screwdriver

Catalog Number

Project Name & Location

Type

## Product Specifications

**DRIVER:** Universal Voltage 120/277v Electronic Driver with 0-10V Dimming (100-10%).

**FINISH:** Corrosion Resistant Polyester Powder Coated Finish.

**HOUSING:** Die Cast Aluminum Housing.

**LENS:** Anti-Yellowing and High Transmission Polycarbonate Diffuser.

**LIGHT ENGINE:** Energy Efficient Light Emitting Diode (LED) - Static Wattage / CCT.

Wattages: 10W, 15W / CCT: 3000K, 3500K, 4000K or 5000K.

**LED LIFETIME:** ≥50,000hrs.




**MOUNTING:** Mounts to standard 3" and 4" recessed junction boxes via mounting strap. Can also be 4-point mounted via supplied mounting screws.

**OPERATING AMBIENT TEMPERATURE:** -20°C to +40°C (-4°F to 122°F)

**COMPLIANCE:** Built to comply with U.S. and Canadian safety standards. RoHS and ADA Compliant. Made in USA. IP66 Rated, suitable for wet location.

**WARRANTY:** 5-Year Limited Warranty.

**DIMENSIONS**

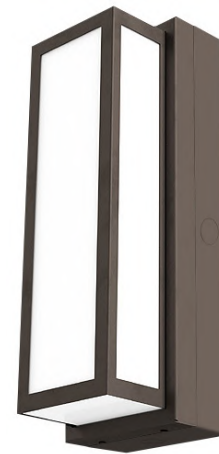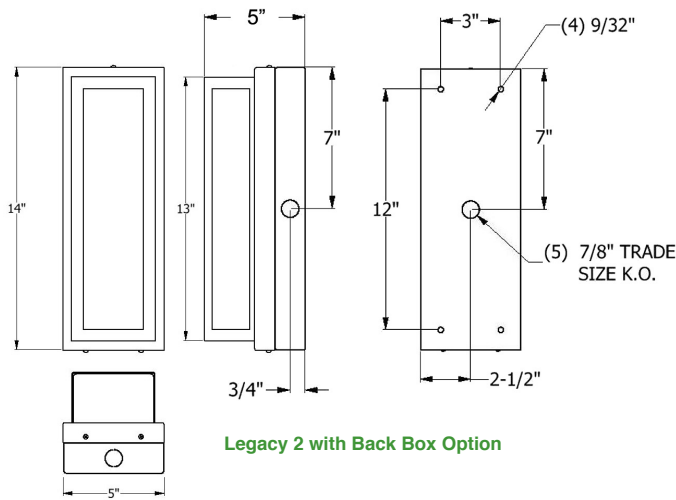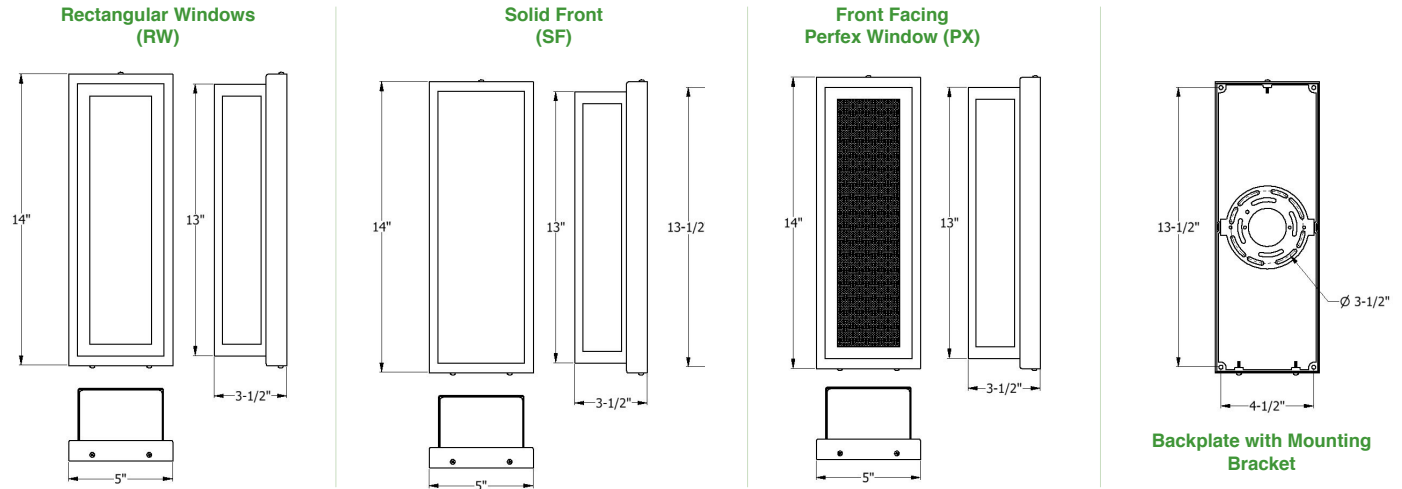

Shown with Optional  
 Conduit Adapter Back Box