






The Ceiling Drum Collection

CARRIBEAN

Decorative Indoor/Outdoor—FL/HID
ADA Compliant Ceiling or Wall Mount



bean:
15.5" Dia. x 3.75" Deep
Carribbean Cast:
15.5" Dia. x 6.875" Deep

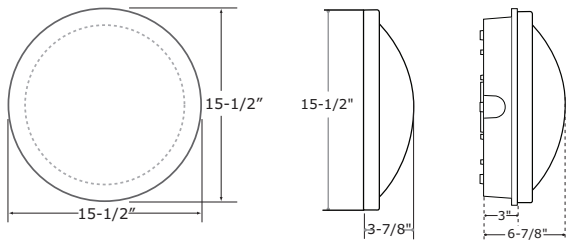

applications

- Building Facades
- Pedestrian Tunnels
- Shopping Centers
- Condominiums
- Public Facilities
- Entrances
- Stairwells
- Hotels
- Retail Stores
- High Abuse Areas
- Walkways
- Balconies
- Schools
- Restaurants



PRODUCT SPECIFICATIONS

BALLAST: 120 or 277 Volt, [EB] electronic zero degree start or [EBX] extreme temp range -30°C to 90°C; [NPF] normal power factor.
DIFFUSER: Opal white polycarbonate — Standard. Optional opal white acrylic.
FINISH: Polyester powder coat white Standard. Optional Custom Colors.
GASKETING: Non-aging high temp black around entire dif-fuser & rear wire entrance hole protects against dust, mois-ture and outside contamination.
HOUSING: CA: Die Cast Aluminum pan furnished with J-box mounting hardware for surface ceiling or wall mount.

ORDERING GUIDE	
SERIES	LED COLOR TEMP
CA = Carribbean Series	3K = ±3000 K
CA-C = Carribbean Cast Series	4K = ±4000 K
	5K = ±5000 K
LAMP TYPE	VOLTAGE
BX = Twin Tube	120 = 120 Volts
DBX = Double Twin Tube Mini-Fluorescent	277 = 277 Volts
TBX = Triple Twin Tube Mini-Fluorescent	BALLAST
MH = Metal Halide (Cast Req'd)	NPF = Normal Power Factor
LED = Super Bright White LED	EB = Electronic Ballast
	UNV = Universal Voltage Electronic Ballast (120-277V)
MAX NO. OF LAMPS/WATTAGE	OPTIONS
Carribbean Series:	AC = Acrylic Diffuser
BX = 18 Watt, 1 Lamp	EM = Emergency Battery (DBX\TBX ONLY)
DBX = 13 or 18 Watt, 1-2 Lamps;	HE = Horizontal Eyelid
26 Watt, 1 Lamp	FUS = HLR/GLR Fuse and Fuse Holder
TBX = 26 or 32 Watt, 1 Lamp	TPD = Tamperproof Screwdriver
LED = 20 Watt LED	FINISH
Carribbean CAST Series:	CC = Custom Finish
BX = 13 Watt, 1-2 Lamps—No EB;	WHT = White
18 Watt, 1 Lamp	
DBX = 13, 18 or 26 Watt, 1-2 Lamps;	
26 Watt, 1 Lamp	
TBX = 18, 26 or 32 Watt, 1-2 Lamps; 42 Watt, 1 Lamp	
MH = 50 Watt (Cast Only)	
LED = 40 Watt LED	

order example:
CA-C-MH-50-120-NPF-WHT

Superb combination of classic styling, spec-grade construction, and energy-efficient illumination. North American luminaires provide smooth, wide spread accent and security lighting with superior weather and van-dal-resistant design features.

Catalog Number	
Project Name & Location	Type

CA-C: Heavy wall cast aluminum with wire access on four sides and back through threaded 1/2" conduit size entrance holes
LAMP: [BX] Biax, [DBX] Double Biax, [TBX] Triple Biax; [MH] Metal Halide.
MOUNTING: CA: Center access hole for mounting to (3) standard trade "J" boxes. (Contractor selected and drilled) CA-C: Four point mounting on 11-1/2" bolt circle.
REFLECTOR: .032 aluminum for high efficiency.
SOCKET: 4 KV rated medium base porcelain with 16 gauge 200 degrees C — SF-2 lead wires
UL LISTED: Suitable for wet or damp locations