


Shallow, drum style MD luminaire provides soft interior lighting with a floating opal white diffuser. No visible hardware. Energy efficient LED comes available in multiple color temperatures to choose from.




MD Series

**DIMENSIONS**

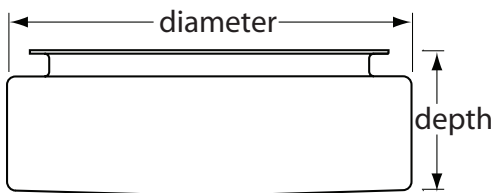

Fixture	Diameter	Depth
MD	11"	3"
	14"	3"
	19"	5"

**OPTIONS**

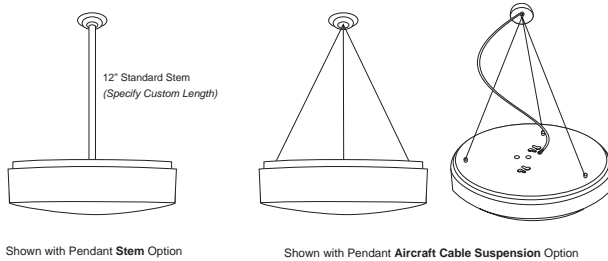

Shown with Pendant Stem Option

Shown with Pendant Aircraft Cable Suspension Option

Catalog Number	
Project Name & Location	Type



**Product Specifications**

**DRIVER:** Universal Voltage 120/277v Electronic Driver is standard for LED.

**DIFFUSER:** Opal Acrylic Standard. Optional Polycarbonate.

**EMERGENCY:** Remote or Integral Emergency Battery (Medium and Large only).

**FINISH:** White Polyurethane Finish. Consult Factory for custom finish).

**HARDWARE INCLUDED:** (1) J Boxstrap, (1) Nipple, (1) Cap Nut.

**LIGHT ENGINE:** Energy Efficient Light Emitting Diode (LED).

**MOUNTING:** Center Access Hole For Mounting To A "J" Box.

**PAN:** White Polyurethane Finished.

**PENDANT:** Standard Pendant Model Aircraft Cable Suspension with white power cord and ceiling canopy. 1/2" conduit size entrance holes. 12" Overall Height (OH) is Standard. Specify stem (ST) or Optional cord (CD).

**SCREWS:** Brass Thumb Screw.

**COMPLIANCE:** Built to comply with U.S. and Canadian safety standards. Suitable for damp locations. (Covered Ceiling Only).

**order example:**

MD-14-LED15-CT4-UNV-TPS-WHT-REM16W

**SERIES**

MD MD Series

**SIZE**

- 11 11" dia. x 3" depth (ADA Compliant)
- 14 14" dia. x 3" depth (ADA Compliant)
- 19 19" dia. x 5" depth

**LED WATTAGE**

MD-11	MD-14	MD-19
15W	15W / 25W	30W

**LED COLOR TEMPERATURE**

- CT3 ±3000K LED Color Temp
- CT4 ±4000K LED Color Temp
- CT5 ±5000K LED Color Temp

**VOLTAGE**

- 120 120 Volts
- 277 277 Volts
- 347 347 Volts
- UNV 120-277 Universal Volt Driver
- 2UNV Two 120-277 Universal Volt Drivers

**OPTIONS**

- 0-10D 0-10V Low Voltage LED Dimming
- 8DIM LED Dimming Forward Phase (TRIAC)
- 9DIM LED Reverse Phase/Trailing Edge ELV Dimming
- 11DIM DALI LED Dimming - Consult Factory
- 12DIM Lutron LED Dimming - Consult Factory
- FUS HLR/GLR Fuse and Fuseholder
- GN Generator Transfer Device
- PC Polycarbonate Diffuser
- PM-AC Pendant Mount with Aircraft Cable Suspension
  - Features White Conduit Cord
  - Specify Length (Up to 10ft)
- PM Pendant Mt Suspension with Stem.
  - 12" Length Standard.
  - Specify Canopy:
    - CS = Canopy Static / CSW = Canopy Swivel
    - \*CSW is 45° Hang Straight for Sloped Ceiling
- TPD Tamperproof Screwdriver
- TPS Tamperproof Screws

**FINISH**

WHT White — Standard

**EMERGENCY BATTERY OPTIONS**

- No Onsite Emergency (AC / DC) is Provided
- Must Specify Voltage: 120V / 277V
- Meets California Energy Commission Title 20 [CEC-400-2014-009-CMF] Efficiency Standards
  - Cold Weather Batteries DO NOT meet CEC Standards
- Cold Weather Emergency Batteries Temp Range: -20°C thru 50°C

REM#W Remote Emergency Battery  
 - Wattages: 4W / 8W / 16W / 20W

REM#W- Remote Emergency Battery - Cold Weather  
 CW - Wattages: 10W / 23W