The Americana Collection
30 CLASS
Indoor/Outdoor — Wall Sconce

ROUND DIFFUSER


Atlanta

Boston


Champaign 2

Chicago


Cleveland


Dayton


Delphi

Detroit

Dixon

Meridian

Mesa

Mobile


Morris


Provo


Pueblo


Pullman

Richmond 2

Roswell


Salt Lake


Stanwood

Tahoe


Tempe


Toledo


Topeka


Welch

SQUARE DIFFUSER


Berkeley


Champaign


Dallas


Hilo


Louisville

Maui


Springfield

TRIANGULAR DIFFUSER

Greenfield

Houston

SHIELD ONLY

Richmond Half-Round


Richmond Rectangle

Richmond Triangular


Seattle

Note: For additional Triangular Cage Styles, see **Americana Flat Band spec-sheet**.

- Modular design: interchangeable diffusers and cages for rapid installation, relamping and maintenance, as well as the ability to design and build new luminaires to meet the exact needs or specifications.
- Three diffuser shapes: Round, Rectangular or Triangular
- Custom Color Matching
- Customizable sconces for design flexibility. Timeless and versatile to fulfill all aesthetic and performance needs.
- Standard Energy Efficient LED (Consult factory for Other Lamping)
- Weather and vandal resistant construction — Standard.
- Meets Buy American Act (BAA) Requirements

ROUND	
Atlanta	30-AL
Boston	30-BN
Champaign 2	30-CP2
Chicago	30-CH
Cleveland	30-CD
Dayton	30-DN
Delphi	30-DP
Detroit	30-DT
Dixon	30-DI
Meridian	30-MER
Mesa	30-ME
Mobile	30-MB
Morris	30-MO
Provo	30-PRV
Pueblo	30-PB
Pullman	30-PL
Richmond 2	30-RD2
Roswell	30-RO
Salt Lake	30-SL
Stanwood	30-SW
Tahoe	30-TH
Tempe	30-TE
Toledo	30-TO
Topeka	30-TK
Welch	30-WE
SQUARE	
Berkeley	30-BL
Champaign	30-CP
Dallas	30-DA
Hilo	30-HI
Louisville	30-LV
Maui	30-MA
Springfield	30-SF
TRIANGLE	
Greenfield	30-GF
Houston	30-HN
SHIELD ONLY	
Richmond Half-Round	30-RD-HRD
Richmond Rectangular	30-RD-RE
Richmond Triangular	30-RD-TI
Seattle	30-SE

CGF design Inc | PO Box 911 | Morton Grove, IL 60053 | p: 847.815.5079 | f: 847.470.9828 | http://www.cgfdesigninc.com | sales@cgfdesigninc.com

Disclaimer: *We reserve the right to revise the design or components of any product without notice.*

30 CLASS SIZE

30 CLASS

SIZE	DIMENSIONS	CENTER WATTS	AVAILABLE UP/DN	UP/DN WATTS	UP/DN WATTS Shield Models Only
30[A]	12¼"W X 30"H x 7¼"D	40W/60W	YES	5W/10W/15W UP[B] 5W/10W/15W DN[B]	15W UP 15W DN

Note [A]: Total Max Wattage: 70W for 30" (includes Center Light with Uplight and/or Downlight)
Note [B]: Conduit Adapter Back Box Option Required (CA)

Catalog Number

Project Name & Location | Type

Product Specifications

BACKPLATE: 16 Ga. aluminum (AL).
BACKBOX: 16 Ga. aluminum (AL) with wire access on four sides and back through 7/8" dia. KO flattened water tight (Optional for surface conduit entry or standard with emergency battery).
CAGE: Square extruded aluminum bars permanently secured by hidden means to the frame. Standard configurations shown.
DIFFUSER: White translucent, fully enclosed non-yellowing 100% virgin acrylic, .125 Thick (1/8"). Optional Clear (CTB) top and/or bottom — CTB is Standard with Uplight and/or Downlight. (See Page 3 for More Information)
DRIVER: Universal Volt (120-277v) electronic driver with 0-10VDC dimming is standard.
FASTENERS: Stainless steel tamperproof screws — (2) To secure cage/frame in place.
FINISH: Corrosion and Weather resistant, extremely durable pre-treated oven baked polyester powder.
GASKETING: High Temp., non-aging black EPDM and/or neoprene rubber around the entire lens perimeter & rear wire entrance hole to protect against dust, moisture & outside contaminants.
MOUNTING: Use (4) or (6) 5/16" diameter holes for 1/4" diameter bolts for outdoor or indoor. 7/8" KO in Center for Wire Access. Must derate lamping for horizontal.
WALL WASH: CTB is Standard with Uplight or/and Downlight. For wall wash patterns specify: LU (Uplight) or LD (Downlight) or LU/LD (Up and Downlight).
COMPLIANCE: Built to comply with U.S. and Canadian safety standards. Meets Buy American Act (BAA) Requirements. Suitable for wet locations.
WARRANTY: 5-Year Limited Warranty.

ORDER EXAMPLES

EX1: 30-BN-LED40-CT4-80CRI-UNV-BK-BLD-REMT
EX2: 30-RD-RE-LU15/LD15-CT5-80CRI-UNV-SV-CTB
EX3: 30-AE-LED40-CT3-80CRI-UNV-BZ-CA30-EM20W

STYLE
Refer to Index Page for Style Name/Code on Page 1
30-xx 30-(xx = Style Code, ex: 30-AT)

MOUNTING
BLANK Wall Mount (Standard)
HM Horizontal Mount
– Requires Conduit Back Box (CA)

LED WATTAGE
Refer to Chart for Size/Wattage Compatibility
See Page 3 for Uplight / Downlight Explanation
LEDxx Center LED(xx=Wattage, ex: LED15)
– NOT Compatible with Shield Models
LUxx LED Uplight(xx=Wattage, ex: LU5)
LDxx LED Downlight(xx=Wattage, ex: LD5)

LED COLOR TEMPERATURE (CCT)
CT3 ±3000K LED Color Temp
CT35 ±3500K LED Color Temp
CT4 ±4000K LED Color Temp
CT5 ±5000K LED Color Temp

COLOR RENDERING INDEX (CRI)
80CRI 80 Color Rendering Index (STANDARD)
90CRI 90 Color Rendering Index (Not Available for 5K)

VOLTAGE
347 347 Volt
UNV 120~277 Universal Volt Electronic Driver

STANDARD FINISH
BK Black
BZ Bronze
PA Painted Aluminum
SV Silver Gray
WHT White

PREMIUM UPCHARGE FINISH
CC Custom Color (Visit www.ralcolor.com)
– Provide RAL# or Make-to-Match Color Chip

INHIBITOR FINISH
+NAT Epoxy Coating for Natatorium
+OFC Epoxy Coating for Ocean Front Environments

CAGE / DIFFUSER OPTIONS
Note: See Page 3 for More Info
ATS Aluminum Top Shield (No Up Light)
ABS Aluminum Bottom Shield (No Down Light)
ATBS Aluminum Top/Bottom Shield (No Up or Down Light)
CB Clear Bottom
CT Clear Top
CTB Clear Top & Bottom (Standard with Up/Down Light)
OB Open Bottom (Indoor Only)
OQB Opaque Bottom (No Down Light)
OQT Opaque Top (No Up Light)
OQTB Opaque Top & Bottom (No Up/Down Light)

Additional Options on PAGE 3

CGF design Inc | PO Box 911 | Morton Grove, IL 60053 | p: 847.815.5079 | f: 847.470.9828 | http://www.cgfdesigninc.com | sales@cgfdesigninc.com

Disclaimer: *We reserve the right to revise the design or components of any product without notice.*

Uplight / Downlight Explained

SCENARIO #1

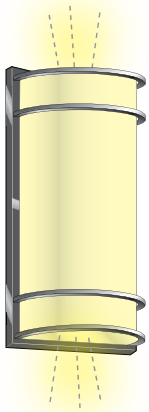

Scenario #1: A soft glow is achieved by the natural transmission of light thru the translucent opal diffuser at the top and bottom of fixture (standard).

SCENARIO #2

Scenario #2: Illumination from the top and bottom is enhanced by the addition of a **Clear Top/Bottom (CTB) Lens** allowing more light to spill out from both ends of the fixture.

SCENARIO #3

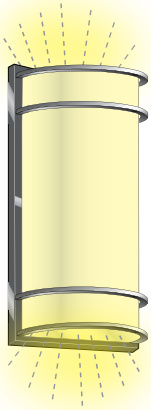

Scenario #3: The addition of ***UP/DN light engines*** to focus even more light out of the top and bottom of the fixture (CTB included).

SCENARIO #4



Scenario #4: No uplight or downlight is achieved by the addition of ***Aluminum Top/Bottom Shield (ATBS)*** or ***Opaque Top/Bottom (OQTB) Lens***.

Why the Back Box?

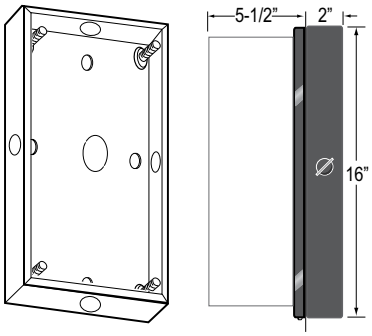

Backbox shown with Americana 16 size.

Back Box Required for:
Photocell, Emergency Battery, Generator Transfer Device (GN), Surface Mounted Conduit Applications and Specific LED Configurations

PHOTOCELL OPTIONS

PHTD	Photocell Button (120/277V) *– Requires Conduit Back Box (CA)*

CONTROL OPTIONS (Choose from Manual or Sensor)

MANUAL CONTROL (Wall Switch or Control System)
Note: Cannot be used with Sensor Controls Below
Note: 0-10V (100-30%) Dimming is Standard

0-10D1	0-10VDC LED Dimming Driver (100-10%)
0-10D2	0-10VDC LED Dimming Driver (100-1%)
BLS	Bi-Level Switching (Includes Two Drivers) *– Requires Conduit Back Box (CA)* *– NOT Compatible with Uplight / Downlight*

OR

SENSOR CONTROL (Sensor Integral to Fixture)
Note: Cannot be used with Manual Controls Above
Note: Sensor Controls are <u>not compatible</u> with Full Shield Styles: RD-HRD, RD-RE, RD-TI, SE
Note: Motion Sensor Max Mounting Height 18-Feet

OCC	Occupancy Sensing / Motion Sensor Integral *– Microwave / Single Feed / 120/277 Only* *– Stand-by Dimming Level Presets: ON/OFF* *– NOT Compatible with Uplight / Downlight*
BLD	Bi-Level Dimming - Motion Sensor Integral *– Microwave / Single Feed / 120/277 Only* *– Stand-by Dimming Level Presets:* 10% / 20% / 30% / 50% *– NOT Compatible with Uplight / Downlight*

CONDUIT ADAPTER BACK BOX OPTIONS
Note: For Surface Conduit

CA30	30" x 2" Backbox

MISC OPTIONS

FUS	Fuse and Fuseholder
DFUS	Dual Fuse and Fuseholder

EMERGENCY BATTERY OPTIONS

- **Emergency Battery are for Center Light Only**
- **Meets California Energy Commission Title 20 [CEC-400-2014-009-CMF] Efficiency Standands (Cold Weather is NON-CEC)**
- **Cold Weather Emergency Batteries Temp Range: -20°C thru 50°C**
- **Integral Emergency Battery Options <u>Requires Conduit Adapter (CA Option)</u>**

EM4W	Integral 4 Watt LED
EM8W	Integral 8 Watt LED
EM10W	Integral 10 Watt LED
EM16W	Integral 16 Watt LED
EM10W-CW	Integral 10 Watt LED - Cold Weather
REM4W	Remote 4 Watt LED
REM8W	Remote 8 Watt LED
REM10W	Remote 10 Watt LED
REM16W	Remote 16 Watt LED
REM10W-CW	Remote 10 Watt LED - Cold Weather

ACCESSORY OPTIONS (Order as a Separate Line)

TPD	Tamperproof Screwdriver
REMT0009	Remote Controller for Sensor Options

CGF design Inc | PO Box 911 | Morton Grove, IL 60053 | p: 847.815.5079 | f: 847.470.9828 | http://www.cgfdesigninc.com | sales@cgfdesigninc.com

Disclaimer: *We reserve the right to revise the design or components of any product without notice.*