The Americana Collection
ADA CLASS
Indoor/Outdoor — Wall Sconce | ADA Compliant

ROUND DIFFUSER

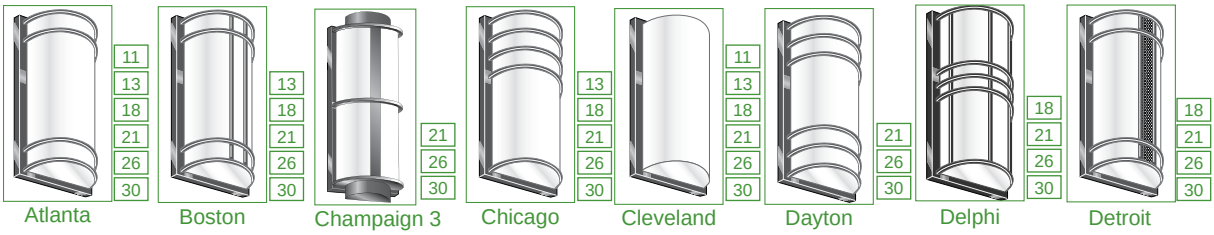

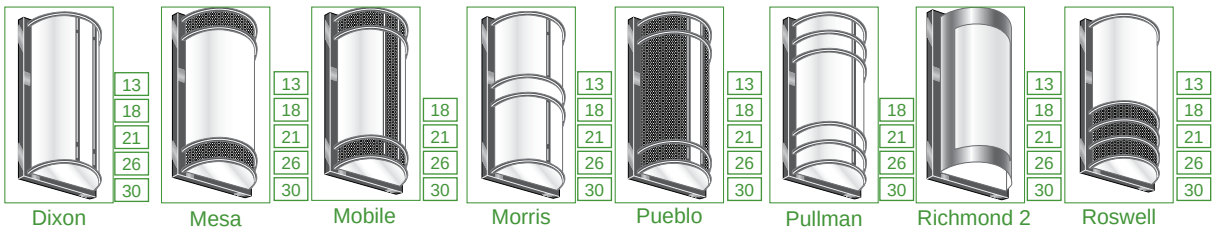

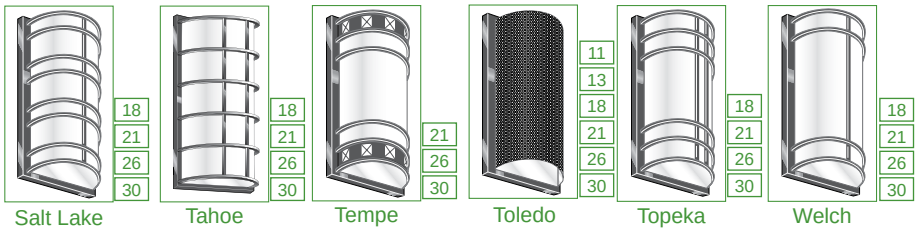

SQUARE DIFFUSER

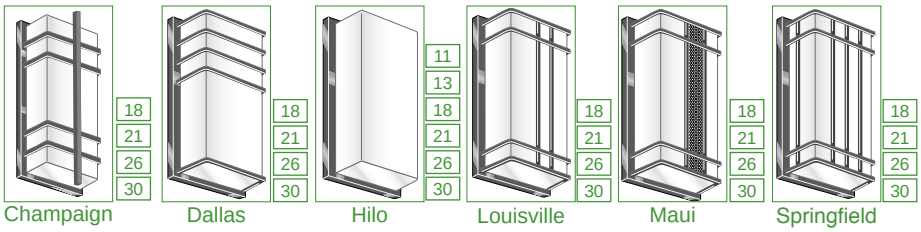

TRIANGULAR DIFFUSER



Note: For additional Triangular Cage Styles, see **Americana Flat Band spec-sheet**.

SHIELD ONLY

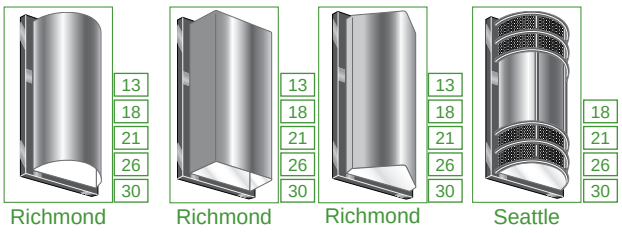

- Modular design: interchangeable diffusers and cages for rapid installation, relamping and maintenance, as well as the ability to design and build new luminaires to meet the exact needs or specifications.
- Three diffuser shapes: Round, Rectangular or Triangular
- Custom Color Matching
- Customizable sconces for design flexibility. Timeless and versatile to fulfill all aesthetic and performance needs.
- Standard Energy Efficient LED (Consult factory for Other Lamping)
- Weather and vandal resistant construction — Standard.
- Meets Buy American Act (BAA) Requirements

ROUND	
Atlanta	ADA-AL
Boston	ADA-BN
Champaign 3	ADA-CP3
Chicago	ADA-CH
Cleveland	ADA-CD
Dayton	ADA-DN
Delphi	ADA-DP
Detroit	ADA-DT
Dixon	ADA-DI
Mesa	ADA-ME
Mobile	ADA-MB
Morris	ADA-MO
Pueblo	ADA-PB
Pullman	ADA-PL
Richmond 2	ADA-RD2
Roswell	ADA-RO
Salt Lake	ADA-SL
Tahoe	ADA-TH
Tempe	ADA-TE
Toledo	ADA-TO
Topeka	ADA-TK
Welch	ADA-WE
SQUARE	
Champaign	ADA-CP
Dallas	ADA-DA
Hilo	ADA-HI
Louisville	ADA-LV
Maui	ADA-MA
Springfield	ADA-SF
TRIANGLE	
Greenfield	ADA-GN
Houston	ADA-HN
SHIELD ONLY	
Richmond Half-Round	ADA-RD-HRD
Richmond Rectangular	ADA-RD-RE
Richmond Triangular	ADA-RD-TI
Seattle	ADA-SE

CGF design Inc | PO Box 911 | Morton Grove, IL 60053 | p: 847.815.5079 | f: 847.470.9828 | http://www.cgfdesigninc.com | sales@cgfdesigninc.com

Disclaimer: *We reserve the right to revise the design or components of any product without notice.*

ADA CLASS

Indoor/Outdoor — Wall Sconce | ADA Compliant

ADA CLASS SIZES

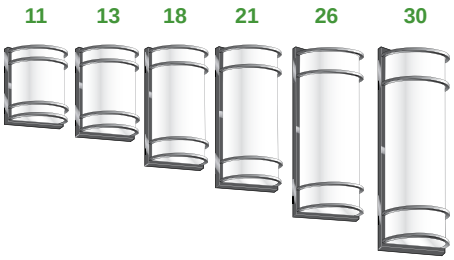

ADA CLASS

SIZE	DIMENSIONS	CENTER WATTS	AVAILABLE UP/DN	UP/DN WATTS	UP/DN WATTS Shield Models Only
11	8¼"W X 11⅛"H x 4"D	10W	NO	N/A	15W UP 15W DN
13	8¼"W X 13¼"H x 4"D	15W	NO	N/A	15W UP 15W DN
18	8¼"W X 18"H x 4"D	15W	YES	5W UP 5W DN	15W UP 15W DN
21	8¼"W X 21"H x 4"D	20W	YES	5W UP 5W DN	15W UP 15W DN
26	8¼"W X 26¼"H x 4"D	25W	YES	5W UP 5W DN	15W UP 15W DN
30	8¼"W X 30"H x 4"D	25W	YES	5W UP 5W DN	15W UP 15W DN

Catalog Number

Project Name & Location Type

Product Specifications

BACKPLATE: 16 Ga. aluminum (AL).
BACKBOX: 16 Ga. aluminum (AL) with wire access on four sides and back through 7/8" dia. KO flattened water tight (Optional for surface conduit entry or standard with emergency battery).
CAGE: Square extruded aluminum bars permanently secured by hidden means to the frame. Standard configurations shown.
DIFFUSER: White translucent, fully enclosed non-yellowing 100% virgin acrylic, .125 Thick (1/8"). Optional Clear (CTB) top and/or bottom — CTB is Standard with Uplight and/or Downlight. (See Page 3 for More Information)
DRIVER: Universal Volt (120-277v) electronic driver with 0-10VDC dimming (100-10%) is standard.
FASTENERS: Stainless steel tamperproof screws — (2) To secure cage/frame in place.
FINISH: Corrosion and Weather resistant, extremely durable pre-treated oven baked polyester powder.
GASKETING: High Temp., non-aging black EPDM and/or neoprene rubber around the entire lens perimeter & rear wire entrance hole to protect against dust, moisture & outside contaminants.
MOUNTING: Use (4) or (6) 5/16" diameter holes for 1/4" diameter bolts for outdoor or indoor. 7/8" KO in Center for Wire Access.
WALL WASH: CTB is Standard with Uplight or/and Downlight. For wall wash patterns specify: LU (Uplight) or LD (Downlight) or LU/LD (Up and Downlight).
COMPLIANCE: Built to comply with U.S. and Canadian safety standards. Meets Buy American Act (BAA) and American Disability Act (ADA) Requirements. Suitable for wet locations.
WARRANTY: 5-Year Limited Warranty.

ORDER EXAMPLES

EX1: ADA-BN-13-LED15-CT4-80CRI-UNV-BK-0-10D2
EX2: ADA-RD-RE-21-LU15/LD15-CT5-80CRI-UNV-SV-CTB
EX3: ADA-AE-26-LED25-LU5/LD5-CT3-80CRI-UNV-BZ-REM20W

STYLE
Refer to Index Page for Style Name/Code on Page 1
ADA-xx Standard-(xx=Style Code, ex: ADA-AL)

SIZE*
Select from Sizes: **11 / 13 / 18 / 21 / 26 / 30**
Refer to Chart for Dimensions
Note: For additional ADA compliant wall sconces,

Note:** ***For additional ADA compliant wall sconces, See Americana Goliath and American Monolith

MOUNTING
BLANK Wall Mount (Standard)

LED WATTAGE
Refer to Chart for Size/Wattage Compatibility
See Page 3 for Uplight / Downlight Explanation
LEDxx LED(xx=Wattage, ex: LED15)
– NOT Compatible with Shield Models
LUxx LED Uplight(xx=Wattage, ex: LU15)
LDxx LED Downlight(xx=Wattage, ex: LD15)

LED COLOR TEMPERATURE (CCT)
CT3 ±3000K LED Color Temp
CT35 ±3500K LED Color Temp
CT4 ±4000K LED Color Temp
CT5 ±5000K LED Color Temp

LED COLOR RENDERING INDEX (CRI)
80CRI 80 Color Rendering Index (STANDARD)
90CRI 90 Color Rendering Index (Not Available for 5K)

VOLTAGE
347 347 Volt
UNV 120~277 Universal Volt Electronic Driver

STANDARD FINISH
BK Black
BZ Bronze
PA Painted Aluminum
SV Silver Gray
WHT White

PREMIUM UPCHARGE FINISH
CC Custom Color (Visit www.ralcolor.com)
– Provide RAL# or Make-to-Match Color Chip

INHIBITOR FINISH
+NAT Epoxy Coating for Natatorium
+OFC Epoxy Coating for Ocean Front Environments

CAGE / DIFFUSER OPTIONS
Note: See Page 3 for More Info
ATS Aluminum Top Shield (No Up Light)
ABS Aluminum Bottom Shield (No Down Light)
ATBS Aluminum Top/Bottom Shield (No Up or Down Light)
CB Clear Bottom
CT Clear Top
CTB Clear Top/Bottom (Standard with Up/Down Light)
OB Open Bottom (Indoor Only)
OQB Opaque Bottom (No Down Light)
OQT Opaque Top (No Up Light)
OQTB Opaque Top & Bottom (No Up/Down Light)

Additional Options on PAGE 3

CGF design Inc | PO Box 911 | Morton Grove, IL 60053 | p: 847.815.5079 | f: 847.470.9828 | http://www.cgfdesigninc.com | sales@cgfdesigninc.com

Disclaimer: *We reserve the right to revise the design or components of any product without notice.*

Uplight / Downlight Explained

SCENARIO #1

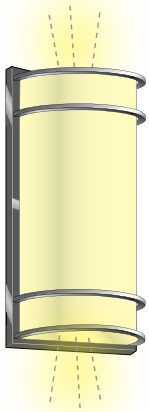

Scenario #1: A soft glow is achieved by the natural transmission of light thru the translucent opal diffuser at the top and bottom of fixture (standard).

SCENARIO #2

Scenario #2: Illumination from the top and bottom is enhanced by the addition of a **Clear Top/Bottom (CTB) Lens** allowing more light to spill out from both ends of the fixture.

SCENARIO #3

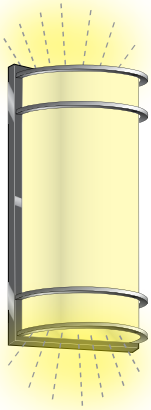

Scenario #3: The addition of ***UP/DN light engines*** to focus even more light out of the top and bottom of the fixture (CTB included).

SCENARIO #4

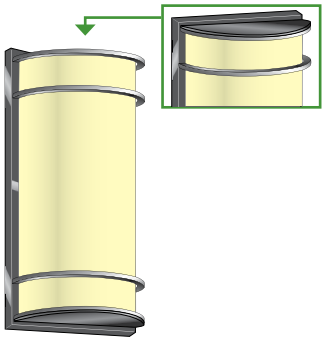

Scenario #4: No uplight or downlight is achieved by the addition of ***Aluminum Top/Bottom Shield (ATBS)*** or ***Opaque Top/Bottom (OQTB) Lens***.

CONTROL OPTIONS (Choose from Manual or Sensor)

MANUAL CONTROL (Wall Switch or Control System)
Note: Cannot be used with Sensor Controls Below
Note: 0-10V (100-10%) Dimming is Standard

0-10D2	0-10VDC LED Dimming Driver (100-1%)
8DIM	LED Dimming Forward Phase (TRIAC)

OR

SENSOR CONTROL (Sensor Integral to Fixture)
Note: Cannot be used with Manual Controls Above
Note: Sensor Controls are <u>not compatible</u> with Full Shield Styles: RD-HRD, RD-RE, RD-TI, SE
Note: Motion Sensor Max Mounting Height 18-Feet

OCC	Occupancy Sensing / Motion Sensor Integral *– Microwave / Single Feed / 120/277 Only* *– Stand-by Dimming Level Presets: ON/OFF* *– NOT Compatible with Uplight / Downlight*

EMERGENCY BATTERY OPTIONS

- **Emergency Battery are for Center Light Only**
- **Meets California Energy Commission Title 20 [CEC-400-2014-009-CMF] Efficiency Standands (Cold Weather is NON-CEC)**
- **Cold Weather Emergency Batteries Temp Range: -20°C thru 50°C**
- **Integral Emergency Battery Options <u>Requires Conduit Adapter (CA Option)</u>**

REM4W	Remote 4 Watt LED
REM8W	Remote 8 Watt LED
REM10W	Remote 10 Watt LED
REM16W	Remote 16 Watt LED

ACCESSORY OPTIONS (Order as a Separate Line)

TPD	Tamperproof Screwdriver

CGF design Inc | PO Box 911 | Morton Grove, IL 60053 | p: 847.815.5079 | f: 847.470.9828 | http://www.cgfdesigninc.com | sales@cgfdesigninc.com

Disclaimer: *We reserve the right to revise the design or components of any product without notice.*