The Dark Sky Collection

ANTIOCH 2

Indoor/Outdoor — LED

Superb combination of classic styling, spec-grade construction, and energy-efficient illumination. Dark Sky luminaires provide smooth, wide spread accent and security lighting while maintaining full cut-off standards to preserve true night sky.

Wattage Controller

DIMENSIONS

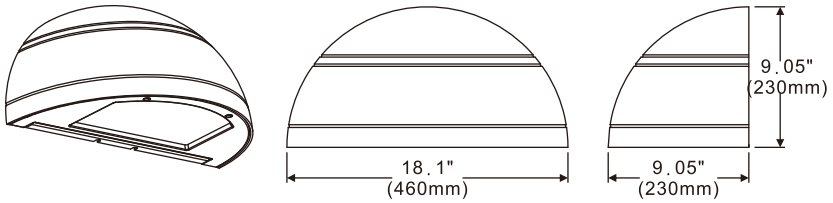

OPTIONS

Photocell Button

Occupancy Sensor

Emergency Battery

Catalog Number	
Project Name & Location	Type

Product Specifications

APPLICATIONS: Colleges, Commercial Buildings, Offices, Hotels, Restaurants, Retail, Schools, Showrooms, Supermarkets.
DIMMING: Wattage controller features 0-10VDC (100-30%) dimming capability.
DRIVER: Universal Voltage 120/277V (50/60Hz) Electronic Driver.
FINISH: UV stabilized powder coated bronze finish. Other colored finishes available for additional costs.
HOUSING: Heavy duty die-cast aluminum with corrosion resistant hardware.
LIGHT ENGINE: Energy Efficient Light Emitting Diode (LED) - Ra>70. Features integral wattage controller which allows the user to adjust the wattage to four preset levels.
LENS: Heat and impact resistant polycarbonate lens.
MOUNTING: Quick mount plate with built-in level bubble.
COMPLIANCE: Built to comply with U.S. and Canadian Safety Standards. Buy American Act / DLC / Title 24 / RoHS Compliant. UL/cUL listed for Wet Locations.
WARRANTY: 5-year Limited Warranty.

order example:

AT2-WT-SLED-CT5-UNV-BZ-OCC-BLD

SERIES

AT2	Antioch 2 Series

LIGHT DISTRIBUTION [must specify]

FT	Forward Throw
WT	Wide Spread Throw

LED WATTAGE

SLED	*Selectable LED Wattages – 15W | 30W | 50W | 72W *– 8621 Lumens (Based on 72W-5000K)*

LED COLOR TEMPERATURE (CCT)

CT4	±4000K LED Color Temp
CT5	±5000K LED Color Temp

VOLTAGE

UNV	120~277 Universal Volt Electronic Driver

STANDARD FINISH

BZ	Bronze - STANDARD

PREMIUM UPCHARGE FINISH
MOQ = 5 Pieces

BK	Black
SV	Silver Gray
WHT	White

PHOTOCELL OPTIONS

PHTD	Photocell Button (120/277V)

CONTROL OPTIONS

OCC-BLD	Bi-Level Dimming | Occupancy Sensor Integral *– Microwave Sensor / 120/277 Only* *– Max Mounting Height: 40ft* *– Light Control: 100% | DIM | OFF* *– Standby Dim Level Presets: 0% 10% 30% 50%*

EMERGENCY BATTERY OPTIONS

- **Meets California Energy Commission Title 20 [CEC-400-2014-009-CMF] Efficiency Standands –Cold Weather Batteries DO NOT meet CEC Standards**
- **Cold Weather Emergency Batteries Temp Range: -20°C thru 50°C**

EM10W	10 Watt Integral Emergency Battery
EM10W-CW	10 Watt Integral Emergency Battery *– Cold Weather*

ACCESSORY OPTIONS
Order As A Separate Line

REMT0009	Remote Controller for Sensor Option

***NOTE:** Fixtures will ship from factory at lowest wattage. It is the installer's responsibility to set the fixture at the desired wattage for their project.*

CGF design Inc | PO Box 911 | Morton Grove, IL 60053 | p: 847.815.5079 | f: 847.470.9828 | http://www.cgfdesigninc.com | sales@cgfdesigninc.com

***Disclaimer:** We reserve the right to revise the design or components of any product without notice.*