



The Commercial/Industrial Collection  
**CARIBBEAN PENDANT**  
 Round Pendant Mount Luminaire — Selectable Wattage & LED



**order example:**  
 CAR-P-SW12-SLED-SCCT-UNV-WHT

<b>SERIES</b>	
CAR-P Caribbean Pendant Series	
<b>MOUNTING</b>	
<b>Note: Diagrams/Examples Available on Page 2</b>	
ST12	12" Stem (1/2" Dia.) w/ Static Canopy
SW12	12" Stem (1/2" Dia.) w/ Swivel Canopy
<b>LED WATTAGE</b>	
<b>Note: Refer to Chart for Wattage / Lumen Output</b>	
SLED	Selectable LED Wattages: 21W   28W
<b>LED COLOR TEMPERATURE (CCT)</b>	
SCCT	Selectable CCT: 3000K   3500K   4000K   5000K
<b>VOLTAGE</b>	
UNV	120/277 Universal Volt Electronic Driver
<b>STANDARD FINISH</b>	
BK	Black
BZ	Bronze
PA	Painted Aluminum
WHT	White — Standard
<b>PREMIUM UPCHARGE FINISH</b>	
CC	Custom Color (Visit <a href="http://www.ralcolor.com">www.ralcolor.com</a> ) — Provide RAL# or Make-to-Match Color Chip
+NAT	Conformal Coating - Light Engine Only
<b>CONTROL OPTIONS</b>	
<b>SENSOR CONTROL</b> (Sensor Integral to Fixture)	
OCC	Occupancy Sensing   Motion Sensor Integral — Microwave / Single Feed / 120/277 Only — Stand-by Dim Level Presets: On/Off (0%/100%) — Max Mounting Height of Fixture: 18ft
<b>MISC OPTIONS</b>	
FUS	Single Fusing
<b>ACCESSORY OPTIONS</b>	
<b>Order As A Separate Line</b>	
REMT	Remote Controller for Sensor Options
TPD	Tamperproof Screwdriver

**WATTAGE / LUMEN INFORMATION**

Wattage	CCT	Lumens	Efficacy
21 Watt	3000K	3,100 Lumens	148 lm/W
	3500K	3,125 Lumens	149 lm/W
	4000K	3,150 Lumens	150 lm/W
	5000K	3,200 Lumens	152 lm/W
28 Watt	3000K	4,100 Lumens	144 lm/W
	3500K	4,125 Lumens	145 lm/W
	4000K	4,150 Lumens	146 lm/W
	5000K	4,200 Lumens	147 lm/W

Catalog Number	
Project Name & Location	Type

**Product Specifications**

**DIFFUSER:** Opal white polycarbonate is standard.

**DRIVER:** Universal Volt (120~277V) Electronic Driver. 0-10V Low Voltage Dimming (100% to 30%) is Standard.

**FINISH:** Polyester powder coat white Standard. Optional Custom Colors.

**GASKETING:** High temp, non-aging black EPDM gasketed seal. Seals diffuser to cast housing to protect against outside contaminants.

**HOUSING:** Spun aluminum housing with built-in heatsinks for thermal management.

**MOUNTING:** Pendant Mount with 12" Stem and Canopy. 1/2" NPT galvanized and powder coated, 12" long stem standard. Optional lengths available.

**COMPLIANCE:** Built to comply with U.S. and Canadian Safety Standards.


**Build America/Buy America Act (BABA) and Buy American Act (BAA) Compliant.**




The Commercial/Industrial Collection  
**CARIBBEAN PENDANT**  
Round Pendant Mount Luminaire — Selectable Wattage & LED

**MOUNTING DETAILS**

**DIMENSIONS**

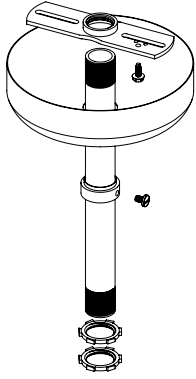

**ST12** = 12" Stem (1/2" Dia.)  
w/ Static Canopy

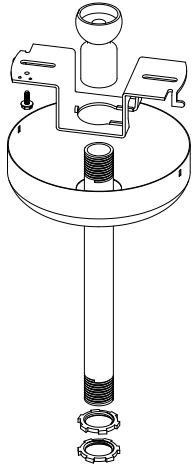

**SW12** = 12" Stem (1/2" Dia.)  
w/ Swivel Canopy

