The Indoor Collection

CARIBBEAN SHALLOW

Low Profile Luminaire (ADA) — Selectable Wattage & LED

WATTAGE / LUMEN INFORMATION

Wattage	CCT	Lumens	Efficacy
21 Watt	3000K	3,100 Lumens	148 lm/W
	3500K	3,125 Lumens	149 lm/W
	4000K	3,150 Lumens	150 lm/W
	5000K	3,200 Lumens	152 lm/W
28 Watt	3000K	4,100 Lumens	144 lm/W
	3500K	4,125 Lumens	145 lm/W
	4000K	4,150 Lumens	146 lm/W
	5000K	4,200 Lumens	147 lm/W

DIMENSIONS



Mounting Holes





Catalog Number	
Project Name & Location	Type

Product Specifications

DIFFUSER: Opal white polycarbonate is standard.
DRIVER: Universal Volt (120~277V) Electronic Driver. 0-10V Low Voltage Dimming (100% to 30%) is Standard.
FINISH: Polyester powder coat white Standard. Optional Custom Colors.
GASKETING: High temp, non-aging black EPDM gasketed seal. Seals diffuser to cast housing to protect against outside contaminants. Gasketing included only for Damp or Wet Location.
HOUSING: Spun aluminum housing with built-in heatsinks for thermal management.
MOUNTING: Indoor Surface, Wall or Ceiling.
COMPLIANCE: Built to comply with U.S. and Canadian Safety Standards. **Build America/Buy America Act (BABA), Buy American Act (BAA), and ADA Compliant.**
WARRANTY: 5-Year Limited Warranty.

order example:
CAR-S-IL-SLED-SCCT-UNV-WHT-OCC

SERIES
CAR-S Caribbean Shallow Series

APPLICATION TYPE
DL Damp Location — Gasket Included
IL Indoor Location — No Gasket Included
WL Wet Location — Gasket Included

LED WATTAGE
Note: Refer to Chart for Wattage / Lumen Output
SLED *Selectable LED Wattages: 21W | 28W

LED COLOR TEMPERATURE (CCT)
SCCT *Selectable CCT:
3000K | 3500K | 4000K | 5000K

VOLTAGE
UNV 120/277 Universal Volt Electronic Driver

STANDARD FINISH
BK Black
BZ Bronze
PA Painted Aluminum
WHT White — Standard

PREMIUM UPCHARGE FINISH
CC Custom Color (Visit www.ralcolor.com)
– Provide RAL# or Make-to-Match Color Chip
+NAT Conformal Coating - Light Engine Only

CONTROL OPTIONS

SENSOR CONTROL (Sensor Integral to Fixture)
OCC Occupancy Sensing | Motion Sensor Integral
– Microwave / Single Feed / 120/277 Only
– Stand-by Dim Level Presets: On/Off (0%/100%)
– Max Mounting Height of Fixture: 18ft

MISC OPTIONS
FUS Single Fusing

ACCESSORY OPTIONS
Order As A Separate Line
REMT Remote Controller for Sensor Options
TPD Tamperproof Screwdriver

***NOTE:** Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.*

CGF design Inc | PO Box 911 | Morton Grove, IL 60053 | p: 847.815.5079 | f: 847.470.9828 | http://www.cgfdesigninc.com | sales@cgfdesigninc.com

Disclaimer: *We reserve the right to revise the design or components of any product without notice.*

CARIBBEAN SHALLOW

Low Profile Luminaire (ADA) — Selectable Wattage & LED

SELECTABLE LED WATTAGE/CCT

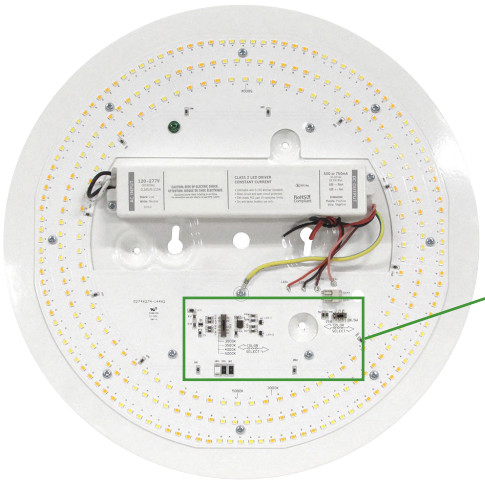

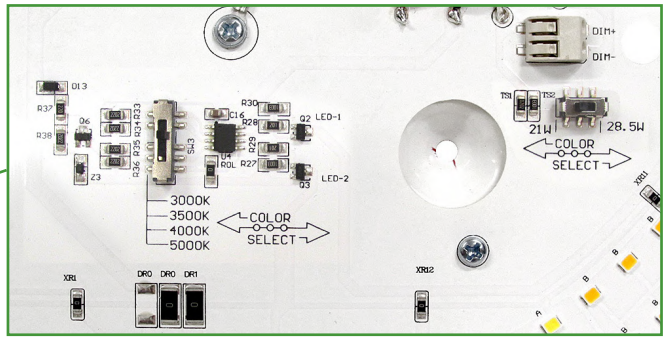

Selectable LED Wattage/CCT Switches
Located on LED Board

CGF design Inc | PO Box 911 | Morton Grove, IL 60053 | p: 847.815.5079 | f: 847.470.9828 | http://www.cgfdesigninc.com | sales@cgfdesigninc.com

Disclaimer: *We reserve the right to revise the design or components of any product without notice.*