




SELECTABLE WATTAGE / LUMENS

Selectable Wattage	3000K	3500K	4000K	5000K
13.5W	2,100 Lumens	2,125 Lumens	2,150 Lumens	2,200 Lumens
17W	2,650 Lumens	2,675 Lumens	2,700 Lumens	2,750 Lumens
20.5W	3,100 Lumens	3,125 Lumens	3,150 Lumens	3,200 Lumens

DIMENSIONS

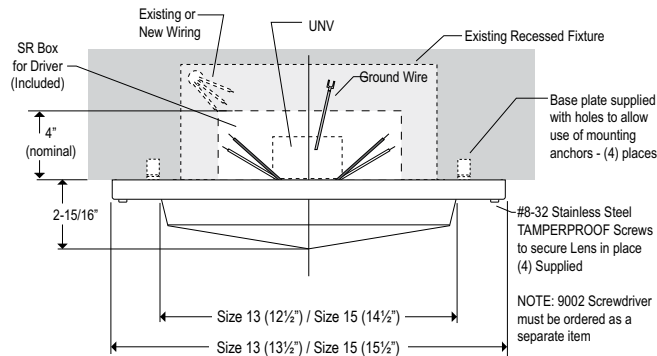

Catalog Number

Project Name & Location

Type

Product Specifications

APPLICATIONS: Eaves, Breezeways, Canopy, Soffit, Stairwell.

DRIVER: 120 or 277 volt electronic driver with 0-10V dimming.

FINISH: White oven baked polyester powder coat finish.

FRAME: Heavy gauge aluminum die-formed, spot welded & phosphate pre-treated.

LAMP: Energy Efficient [LED] Light Emitting Diode.

LENS: .125" thick prismatic polycarbonate drop tapered sides lens is standard

LENS FASTENERS: Heavy gauge cold rolled steel retaining angles. Attached to through-door studs for positive lens clamping.

MOUNTING: Surface Ceiling Mount. Allow 4" depth for SR box for driver.

COMPLIANCE: Built according to U.S. and Canadian safety standards. **Build America (BABA)** and **Buy American Act (BAA)** compliant.

WARRANTY: Standard 5 Years, defects and workmanship.

order example:

EX1: CU-K-13-LED25-CT4-UNV-WHT-0-10D1
EX2: CU-K-15-SLED-SCCT-UNV-BK-REM10W

SERIES

CU-K Columbus-K Series
CU-K- Columbus-K Non-Electrical Series
NE – Cover Only w/Diffuser
– Indicate Size as Complete Catalog #
– Example: CU-K-NE-15

SIZE

13 13.5" Square x 3" Deep
15 15.5" Square x 3" Deep

LED WATTAGE

LED25 25 Watt LED
LED35 35 Watt LED

SLED *Selectable Wattage: 13.5W | 17W | 20.5W
– See Chart for Lumen Output

LED COLOR TEMPERATURE (CCT)

CT3 ±3000K LED Color Temp
CT4 ±4000K LED Color Temp
CT5 ±5000K LED Color Temp

SCCT *Selectable CCT: 3000K | 3500K | 4000K | 5000K
– SCCT Available Only with SLED

VOLTAGE

UNV 120–277 Universal Volt Electronic Driver

FINISH

BK Black
BZ Bronze
PA Painted Aluminum
SV Silver Gray
WHT White

PREMIUM UPCHARGE FINISH

CC Custom Color (Visit www.ralcolor.com)
– Provide RAL# or Make-to-Match Color Chip

DIMMING OPTIONS

Note: 0-10V 100%-30% is Standard

0-10D1 0-10VDC LED Dimming Driver (100-10%)
0-10D2 0-10VDC LED Dimming Driver (100-1%)

MISC OPTIONS

FUS GLR Fuse and Fuseholder

EMERGENCY BATTERY OPTIONS

- No Onsite Emergency (AC / DC) is Provided
- Emergency Battery Options Meet California Energy Commission Title 20 [CEC-400-2014-009-CMF] Efficiency Standards (Cold Weather is NON-CEC)
- Cold Weather Emergency Batteries Temp Range: -20°C thru 50°C
- Constant Power Batteries have Constant Lumens
- Max Whip Length for REM is 8ft

REM4W Remote 4 Watt LED

REM8W Remote 8 Watt LED

REM10W Remote 10 Watt LED

REM10W- CW Remote 10 Watt LED - Cold Weather

ACCESSORY OPTIONS (Order As A Separate Line)

TPD Tamperproof Screwdriver

*NOTE: Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.