




The Americana Collection Richmond 4

Indoor/Outdoor — LED

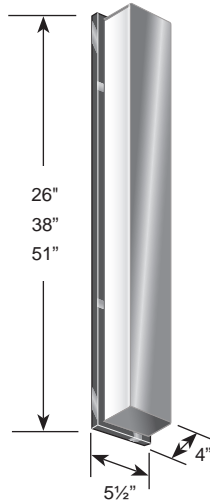

order example:

RD4-38-LED30-CT4-80CRI-UNV-PA-0-10D2

SERIES

RD4 Richmond 4 Series

SIZE

26 5.5" W x 26.25" H x 4" D

38 5.5" W x 38" H x 4" D

51 5.5" W x 51" H x 4" D

LED WATTAGES

LED15 15 Watt LED - 1650 Initial Lumens (Size 26 Only)

LED30 30 Watt LED - 3300 Initial Lumens (Size 38 / 51 Only)

LED COLOR TEMPERATURE

CT3 ±3000K LED Color Temp

CT4 ±4000K LED Color Temp

CT5 ±5000K LED Color Temp

COLOR RENDERING INDEX (CRI)

80CRI 80 Color Rendering Index (STANDARD)

90CRI 90 Color Rendering Index (Not Available for 5K)

VOLTAGE

UNV 120-277 Universal Volt Electronic Driver

STANDARD FINISH

BK Black

BZ Bronze

PA Painted Aluminum

SG Silver Gray

WHT White

PREMIUM UPCHARGE FINISH

CC Custom Color (Visit www.ralcolor.com)
— Provide RAL# or Make-to-Match Color Chip

CONTROL OPTIONS

MANUAL CONTROL (Wall Switch or Control System)

Note: 0-10V 100%-30% is Standard

0-10D1 0-10VDC LED Dimming Driver (100-10%)

0-10D2 0-10VDC LED Dimming Driver (100-1%)

CENTER WINDOW OPTIONS

CW Center Window
Color Window Options
— AM = Amber
— BL = Blue
— GN = Green
— RD = Red
— WH = WH
— CC = Custom Color (Consult Factory)

CONDUIT ADAPTER BACK BOX OPTIONS

Note: for Surface Conduit and Integral Battery

CA26 26" x 2" Conduit Adapter Back Box

CA38 38" x 2" Conduit Adapter Back Box

CA51 51" x 2" Conduit Adapter Back Box

MISC OPTIONS

FUS Single Fusing

EMERGENCY BATTERY OPTIONS

- Emergency Battery Options Meet California Energy Commission Title 20 [CEC-400-2014-009-CMF] Efficiency Standards
- Max Whip Length for REM is 8ft
- Integral Emergency Battery Options **Requires Conduit Adapter (CA Option)**

EM4W Integral 4 Watt LED

REM8W Remote 8 Watt LED

REM10W Remote 10 Watt LED


REM16W Remote 16 Watt LED

ACCESSORY OPTIONS

Order As A Separate Line

TPD Tamperproof Screwdriver

Color Window Options

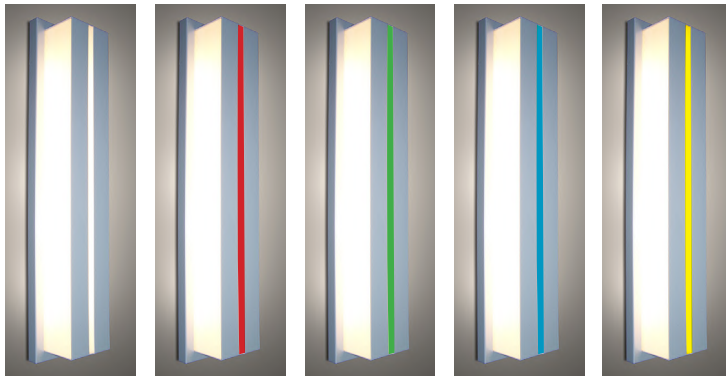

Catalog Number

Project Name & Location

Type

Product Specifications

DRIVER: Universal Volt (120-277V) electronic driver with 0-10V dimming is standard.

BACKPLATE: 16 Ga. aluminum (AL).

DIFFUSER: White translucent, fully enclosed non-yellowing 100% virgin acrylic, .125 Thick (1/8").

SHIELD: Solid Aluminum Opaque Shield with Optional Center-Cut Aperture along length of fixture - specify shield finish. Optional Color Window.

FINISH: Corrosion and Weather resistant, extremely durable pre-treated oven baked polyester powder.

GASKETING: High Temp., non-aging black EPDM and/or neoprene rubber around the entire lens perimeter & rear wire entrance hole to protect against dust, moisture & outside contaminants.

FASTENERS: Stainless steel tamperproof screws —(2) To secure lens in place.

LIGHT ENGINE: Energy Efficient Light Emitting Diode.

MOUNTING: Use (4) or (6) 5/16" diameter holes for 1/4" diameter bolts for outdoor or indoor (no center access hole for J-Box mount). Must derate lamping for horizontal.

COMPLIANCE: Built to comply with U.S. and Canadian safety standards. Suitable for wet locations.