



# The Cylinder Collection

## VENTURA

Decorative Ceiling or Wall Mount




### WATTAGE / LUMEN INFORMATION

Static Wattage	CCT	Lumens	Efficacy
25 Watt	3000K	3,700 Lumens	148 lm/W
	3500K	3,800 Lumens	152 lm/W
	4000K	3,850 Lumens	154 lm/W
	5000K	3,980 Lumens	159 lm/W

Selectable Wattage	CCT	Lumens	Efficacy
21 Watt	3000K	3,100 Lumens	148 lm/W
	3500K	3,125 Lumens	149 lm/W
	4000K	3,150 Lumens	150 lm/W
	5000K	3,200 Lumens	152 lm/W
28 Watt	3000K	4,100 Lumens	144 lm/W
	3500K	4,125 Lumens	145 lm/W
	4000K	4,150 Lumens	146 lm/W
	5000K	4,200 Lumens	147 lm/W

### DIMENSIONS

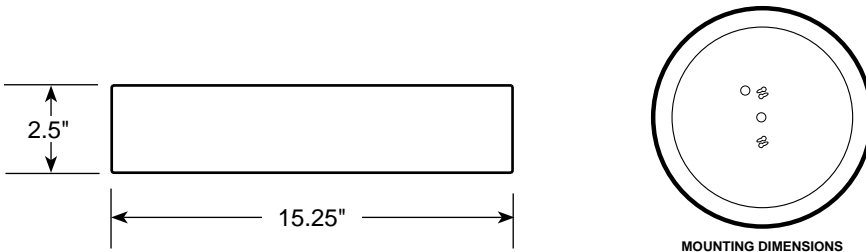

Catalog Number	
Project Name & Location	Type

### Product Specifications

**DRIVER:** Universal Voltage 120/277v Electronic Driver is standard for LED.

**DIFFUSER:** Opal Acrylic Standard. Optional Polycarbonate.

**DECORATIVE TRIM:** Heavy Gauge Aluminum with Solid Shield Trim.

**EMERGENCY:** LED — Remote Emergency Battery.

**FINISH:** Heavy Gauge Aluminum Trim. White Polyurethane Powder Coated Finish is Standard.

**HARDWARE INCLUDED:** (1) J Boxstrap, (1) Nipple, (1) Cap Nut.

**LIGHT ENGINE:** Energy Efficient LED with Static or Selectable Wattage/CCT.

**MOUNTING:** Center Access Hole For Mounting To A "J" Box.

**PAN:** White Polyurethane Finished Aluminum.

**SCREWS:** Brass Thumb Screw.

**COMPLIANCE:** Built to comply with U.S. and Canadian safety standards. Suitable for damp locations.

**Build America/Buy America (BABA), Buy American Act (BAA) compliant.**

**WARRANTY:** 5-Year Limited Warranty.

### order example:

EX: VN-M-LED25-CT4-80CRI-UNV-WHT-SM-BLD  
 EX: VN-M-SLED-SCCT-UNV-WHT-OCC

### SERIES

VN-M Ventura Series

### LED WATTAGE

LED25 25 Watt LED  
 SLED \*Selectable LED Wattage: 21W | 28W

### LED COLOR TEMPERATURE (CCT)

CT3 ±3000K LED Color Temp  
 CT35 ±3500K LED Color Temp  
 CT4 ±4000K LED Color Temp  
 CT5 ±5000K LED Color Temp  
 SCCT \*Selectable CCT: 3000K | 3500K | 4000K | 5000K  
 – SCCT Compatible with SLED Only

### COLOR RENDERING INDEX (CRI)

80CRI 80 Color Rendering Index (STANDARD)  
 90CRI 90 Color Rendering Index  
 – Not Available for 5K  
 – NOT Compatible with SLED

### VOLTAGE

UNV 120~277 Universal Volt Driver

### STANDARD FINISH

WHT White — STANDARD

### PREMIUM UPCHARGE FINISH

BK Black  
 BZ Bronze  
 PA Painted Aluminum  
 SV Silver Gray  
 CC Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))  
 – Provide RAL# or Make-to-Match Color Chip

### INHIBITOR FINISH

+NAT Epoxy Coating for Natatorium  
 – LED Boards Only

### LENS OPTION

PC Polycarbonate White Lens


### MOUNTING

SM Surface Mount — STANDARD  
 AAC Adjustable Aircraft Cable (Up to 120")  
 PM12- Pendant 12" Length Conduit Stem (½" IPS)  
 SWC-RR – Includes Swivel Canopy for 4" Round Box  
 PM24- Pendant 24" Length Conduit Stem (½" IPS)  
 SWC-RR – Includes Swivel Canopy for 4" Round Box  
 PM36- Pendant 36" Length Conduit Stem (½" IPS)  
 SWC-RR – Includes Swivel Canopy for 4" Round Box  
 PMXX- Pendant Custom Length Conduit Stem (½" IPS)  
 SWC-RR – Includes Swivel Canopy for 4" Round Box

### Additional Options on PAGE 2


**\*NOTE:** Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.

**PENDANT CANOPY SWIVEL KIT**

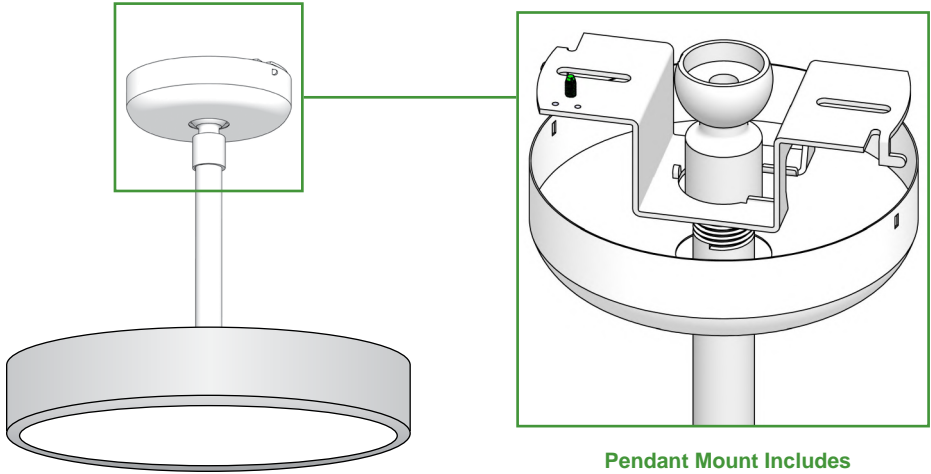

Pendant Mount Includes  
 Canopy Swivel Kit

**AIRCRAFT CABLE MOUNTING**

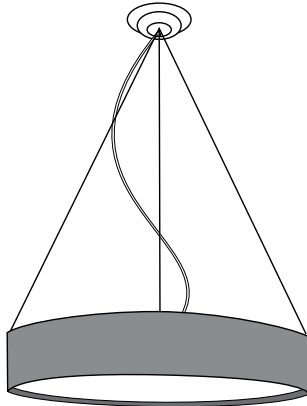

Adjustable Aircraft Cable (AAC)  
 Up to 120"

**CONTROL OPTIONS (Choose from Manual or Sensor)**

**MANUAL CONTROL** (Wall Switch or Control System)  
**Note: Cannot be used with Sensor Controls Below**  
**Note: 0-10V (100-30%) Dimming is Standard**

- 0-10D1 0-10VDC LED Dimming Driver (100-10%)  
 – NOT Compatible with SLED
- 0-10D2 0-10VDC LED Dimming Driver (100-1%)  
 – NOT Compatible with SLED
- BLS Bi-Level Switching - Uses 2 Drivers (2UNV)  
 – NOT Compatible with SLED

**OR**

**SENSOR CONTROL** (Sensor Integral to Fixture)  
**Note: Cannot be used with Manual Controls Above**  
**Note: Motion Sensor Max Mounting Height 18-Feet**

- OCC Occupancy Sensing | Motion Sensor Integral  
 – Microwave / Single Feed / 120/277 Only  
 – Stand-by Dim Level Presets: On/Off (0%/100%)
- BLD Bi-Level Dimming | Motion Sensor Integral  
 – Microwave / Single Feed / 120/277 Only  
 – Stand-by DimLevel Presets:  
 10% / 20% / 30% (Standard) / 50%  
 – NOT Compatible with SLED

**EMERGENCY BATTERY OPTIONS**

- Emergency Battery Options Meet California Energy Commission Title 20 [CEC-400-2014-009-CMF] Efficiency Standands (Cold Weather is NON-CEC)
- Cold Weather Emergency Batteries Temp Range: -20°C thru 50°C
- Constant Power Batteries have Constant Lumens
- Max Whip Length for REM is 8ft

EM8W Integral 8 Watt LED

REM8W Remote 8 Watt LED

REM10W- Remote 10 Watt LED - Cold Weather CW

**MISC OPTIONS**

FUS Single Fusing

FUS2 Double Fusing

TPS Tamperproof Screws

**ACCESSORY OPTIONS**

**Order As A Separate Line**

REMT0019 Remote Controller for Sensor Options

TPD Tamperproof Screwdriver