The Cylinder Collection

VENTURA

Decorative Ceiling or Wall Mount

WATTAGE / LUMEN INFORMATION

Static Wattage	Static CCT	Lumens	Efficacy
25 Watt	3000K	3,700 Lumens	148 lm/W
	3500K	3,800 Lumens	152 lm/W
	4000K	3,850 Lumens	154 lm/W
	5000K	3,980 Lumens	159 lm/W

Selectable Wattage	Selectable CCT	Lumens	Efficacy
21 Watt	3000K	3,100 Lumens	148 lm/W
	3500K	3,125 Lumens	149 lm/W
	4000K	3,150 Lumens	150 lm/W
	5000K	3,200 Lumens	152 lm/W
28 Watt	3000K	4,100 Lumens	144 lm/W
	3500K	4,125 Lumens	145 lm/W
	4000K	4,150 Lumens	146 lm/W
	5000K	4,200 Lumens	147 lm/W

DIMENSIONS

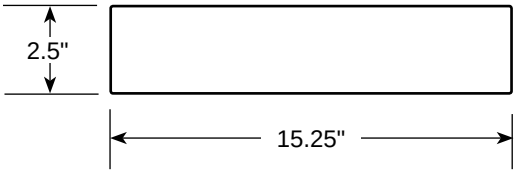



MOUNTING DIMENSIONS

Catalog Number

Project Name & Location

Type

Product Specifications

DRIVER: Universal Voltage 120/277v Electronic Driver is standard for LED.
DIFFUSER: Opal Acrylic Standard. Optional Polycarbonate.
DECORATIVE TRIM: Heavy Gauge Aluminum with Solid Shield Trim.
EMERGENCY: LED — Remote Emergency Battery.
FINISH: Heavy Gauge Aluminum Trim. White Polyurethane Powder Coated Finish is Standard.
GASKETING: High temp, non-aging black EPDM gasketed seal. Seals diffuser to cast housing to protect against outside contaminants. Gasketing included only for Damp or Wet Location.
HARDWARE INCLUDED: (1) J Boxstrap, (1) Nipple, (1) Cap Nut.
LIGHT ENGINE: Energy Efficient LED with Static or Selectable Wattage/CCT.
MOUNTING: Center Access Hole For Mounting To A "J" Box.
PAN: White Polyurethane Finished Aluminum.
SCREWS: Brass Thumb Screw.
COMPLIANCE: Built to comply with U.S. and Canadian safety standards. Suitable for damp locations.
Build America/Buy America (BABA), Buy American Act (BAA) compliant.
WARRANTY: 5-Year Limited Warranty.

order example:

EX: VN-M-DL-LED25-CT4-80CRI-UNV-WHT-SM-BLD
EX: VN-M-IL-SLED-SCCT-UNV-WHT-OCC

SERIES
VN-M Ventura Series

APPLICATION TYPE
DL Damp Location — Gasket Included
IL Indoor Location — No Gasket Included
WL Wet Location — Gasket Included

LED WATTAGE
LED25 25 Watt LED
SLED *Selectable LED Wattage: 21W | 28W

LED COLOR TEMPERATURE (CCT)
CT3 ±3000K LED Color Temp
CT35 ±3500K LED Color Temp
CT4 ±4000K LED Color Temp
CT5 ±5000K LED Color Temp
SCCT *Selectable CCT: 3000K | 3500K | 4000K | 5000K
– SCCT Compatible with SLED Only

COLOR RENDERING INDEX (CRI)
80CRI 80 Color Rendering Index (STANDARD)
90CRI 90 Color Rendering Index
– Not Available for 5K
– NOT Compatible with SLED

VOLTAGE
UNV 120~277 Universal Volt Driver

STANDARD FINISH
WHT White — STANDARD

PREMIUM UPCHARGE FINISH
BK Black
BZ Bronze
PA Painted Aluminum
SV Silver Gray
CC Custom Color (Visit www.ralcolor.com)
– Provide RAL# or Make-to-Match Color Chip

INHIBITOR FINISH
+NAT Epoxy Coating for Natatorium
– LED Boards Only

LENS OPTION
PC Polycarbonate White Lens

MOUNTING
SM Surface Mount — STANDARD
AAC Adjustable Aircraft Cable (Up to 120")
PM12-SWC-RR Pendant 12" Length Conduit Stem (½" IPS)
– Includes Swivel Canopy for 4" Round Box
PM24-SWC-RR Pendant 24" Length Conduit Stem (½" IPS)
– Includes Swivel Canopy for 4" Round Box
PM36-SWC-RR Pendant 36" Length Conduit Stem (½" IPS)
– Includes Swivel Canopy for 4" Round Box
PMXX-SWC-RR Pendant Custom Length Conduit Stem (½" IPS)
– Includes Swivel Canopy for 4" Round Box

Additional Options on PAGE 2

***NOTE:** Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.*

CGF design Inc | PO Box 911 | Morton Grove, IL 60053 | p: 847.815.5079 | f: 847.470.9828 | http://www.cgfdesigninc.com | sales@cgfdesigninc.com

***Disclaimer:** We reserve the right to revise the design or components of any product without notice.*

PENDANT CANOPY SWIVEL KIT

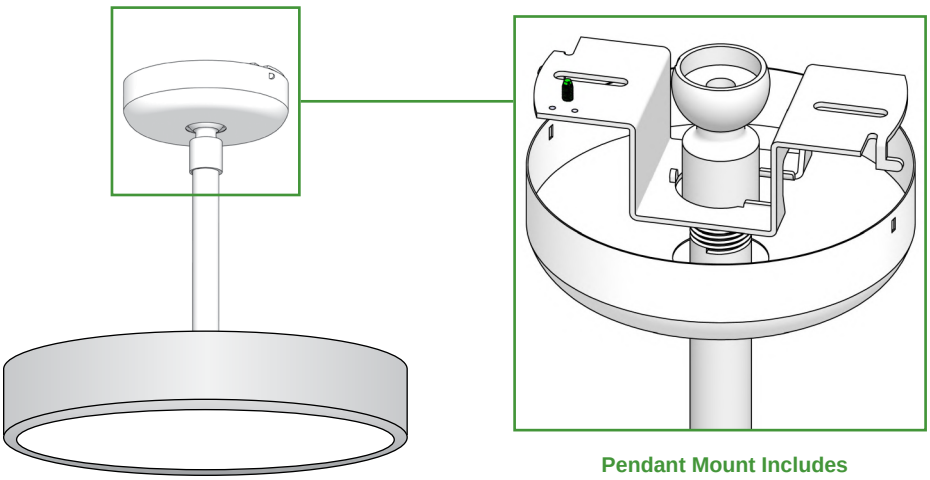

Pendant Mount Includes Canopy Swivel Kit

AIRCRAFT CABLE MOUNTING

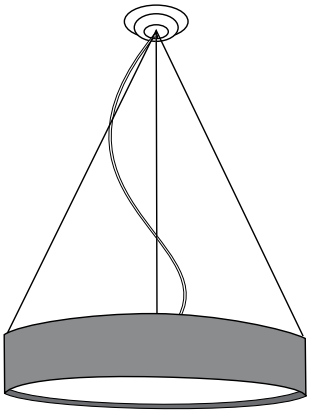

Adjustable Aircraft Cable (AAC)
Up to 120”

CONTROL OPTIONS (Choose from Manual or Sensor)

MANUAL CONTROL (Wall Switch or Control System)
Note: Cannot be used with Sensor Controls Below
Note: 0-10V (100-30%) Dimming is Standard

0-10D1	0-10VDC LED Dimming Driver (100-10%) *– NOT Compatible with SLED*
0-10D2	0-10VDC LED Dimming Driver (100-1%) *– NOT Compatible with SLED*
BLS	Bi-Level Switching - Uses 2 Drivers (2UNV) *– NOT Compatible with SLED*

OR

SENSOR CONTROL (Sensor Integral to Fixture)
Note: Cannot be used with Manual Controls Above
Note: Motion Sensor Max Mounting Height 18-Feet

OCC	Occupancy Sensing | Motion Sensor Integral *– Microwave / Single Feed / 120/277 Only* *– Stand-by Dim Level Presets: On/Off (0%/100%)*
BLD	Bi-Level Dimming | Motion Sensor Integral *– Microwave / Single Feed / 120/277 Only* *– Stand-by DimLevel Presets:* 10% / 20% / 30% (Standard) / 50% *– NOT Compatible with SLED*

EMERGENCY BATTERY OPTIONS

- **Emergency Battery Options Meet California Energy Commission Title 20 [CEC-400-2014-009-CMF] Efficiency Standands (Cold Weather is NON-CEC)**
- **Cold Weather Emergency Batteries Temp Range: -20°C thru 50°C**
- **Constant Power Batteries have Constant Lumens**
- **Max Whip Length for REM is 8ft**

EM8W	Integral 8 Watt LED
REM8W	Remote 8 Watt LED
REM10W-CW	Remote 10 Watt LED - Cold Weather

MISC OPTIONS

FUS	Single Fusing
FUS2	Double Fusing
TPS	Tamperproof Screws

ACCESSORY OPTIONS
Order As A Separate Line

REMT0019	Remote Controller for Sensor Options
TPD	Tamperproof Screwdriver

CGF design Inc | PO Box 911 | Morton Grove, IL 60053 | p: 847.815.5079 | f: 847.470.9828 | http://www.cgfdesigninc.com | sales@cgfdesigninc.com

Disclaimer: *We reserve the right to revise the design or components of any product without notice.*