



order example:

W2-FSM-SLED-SCCT-UNV-BZ-PHTD-EM8W

SERIES

W2-FSM Wall Pack - Field Selectable Series

LED WATTAGES

Note: See Chart for Wattage/Lumen Output

SLED *Selectable LED Wattage: 30W | 50W | 70W | 90W

LED COLOR TEMPERATURE (CCT)

SCCT *Selectable CCT: 3000K | 4000K | 5000K

VOLTAGE

UNV 120-277 Universal Volt Electronic Driver

STANDARD FINISH

BZ Bronze

PHOTOCELL OPTION

PHTD Photocell

EMERGENCY BATTERY OPTION


EM8W Integral Emergency LED Battery 8 Watt
– 900 Lumens
– 90 Minute Backup Time
– Operating Temp: 10°C to 40°C / 50°F to 104°F

***NOTE:** Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.

SELECTABLE WATTAGE / LUMENS

Setting	System Wattage	CRI	Lumens (3000K)	LPW (3000K)	Lumens (4000K)	LPW (4000K)	Lumens (5000K)	LPW (5000K)
Level 1	90W	80	12,000lm	133 lm/W	12,500lm	139 lm/W	12,200lm	136 lm/W
Level 2	70W	80	9800lm	140 lm/W	10,200lm	145 lm/W	9900lm	142 lm/W
Level 3	50W	80	7500lm	150 lm/W	7800lm	155 lm/W	7600lm	152 lm/W
Level 4	30W	80	4800lm	160 lm/W	5000lm	165 lm/W	4900lm	162 lm/W

DIMENSIONS

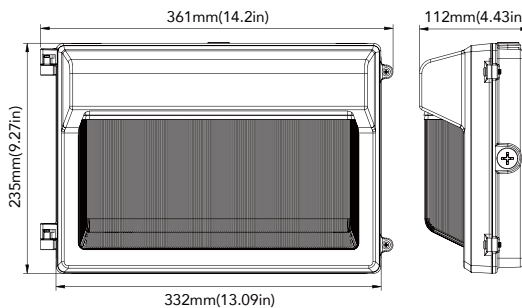

Catalog Number

Project Name & Location

Type

Product Specifications

DRIVER: Universal Volt 120/277V electronic driver with 0-10V low voltage dimming (100-30%).

EMERGENCY: Optional 8W Emergency Battery is available.

FINISH: Weatherproof polyester powder coated finish.

HOUSING: Die-cast aluminum, corrosion-resistant housing which conducts heat for optimal thermal management. Housing is fully-sealed which prevents moisture and external elements from contaminating the internal components.

LENS: UV stabilized polycarbonate prismatic lens design provides optimal light distribution and uniformity.

LIGHT ENGINE: Energy efficient LED - Field Selectable Wattage / CCT. (50,000hr lifespan)

OPERATING TEMPERATURE: -40°C to 40°C / -40°F to 104°F.


MOUNTING: Wall mounts to J-BOX via separate mounting plate.

PHOTOCELL: Optional 120-277V Photocell is available.

COMPLIANCE: Built to comply with U.S. and Canadian Safety Standards. UL/cUL Listed for Wet Locations.

WARRANTY: 5-year Limited Warranty.

SELECTABLE WATTAGE / CCT CONTROLLER

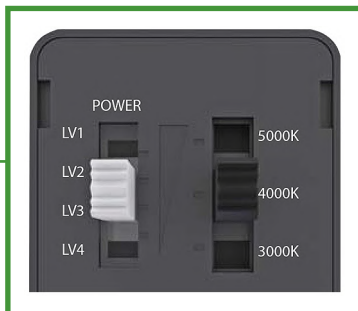

Selectable Wattage / CCT Controller

Located on the side of the fixture with easy access through the removable screw plug.

Allows the user to make adjustments to the wattage and CCT via the dip switches in the field without a third-party service.

OPTIONS



Optional Photocell

Located on top of the fixture with easy access through the removable screw plug.

Allows the user to enable or disable the photocell by adjusting the dipswitch in the field without a third-party service.



Optional Emergency Battery

8 Watt Emergency Battery provides 900 lumens of light for 90 minutes.