



# The North American Collection

## “WISCONSIN” ROUND SHALLOW (Selectable Wattage/CCT Series)

Indoor/Outdoor — Vandal Wall Pack Family | Selectable Wattage / CCT | ADA Compliant



Greenbay (GB)



Kenosha (KN)



Milwaukee (ML)




Hudson (HU)

### SELECTABLE LED WATTAGE / LUMENS

Selectable LED Wattage / Lumen Output		
Low Power	Medium Power	High Power
13.5 Watt (2150 Lumens)	17 Watt (2400 Lumens)	20.5 Watt (3150 Lumens)

Note: Lumen output based on 4000K CCT.

### DIMENSIONS

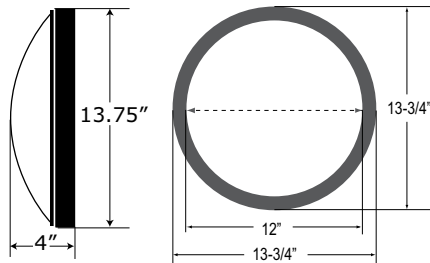

Catalog Number	
Project Name & Location	Type



### order example:

KN-4-SLED-SCCT-UNV-BK-FRO

#### SERIES

- GB Greenbay Series
- HU Hudson Series
- KN Kenosha Series
- ML Milwaukee Series

#### SIZES

- 4 13.75" Diameter Height x 4" Depth
- ADA Compliant
- Not for Use with Side Conduit Entry

#### LED WATTAGES

Note: Refer to Chart for Lumen Output

- SLED \*Selectable LED Wattage: 13.5W | 17W | 20.5W

#### LED COLOR TEMPERATURE (CCT)

- SCCT \*Selectable CCT: 3000K | 3500K | 4000K | 5000K

#### VOLTAGES

- UNV 120–277 Universal Volt Driver

#### STANDARD FINISH

- BK Black
- WHT Textured White

#### PREMIUM UPCHARGE FINISH

Note: Premium Finishes Require MOQ = 5pcs

- BZ Bronze
- PA Painted Aluminum
- CC Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))
- Provide RAL# or Make-to-Match Color Chip

#### INHIBITOR FINISH

Note: Inhibitor Finishes Require MOQ = 5pcs

- +NAT Epoxy Coating for Natatorium
- +OFC Epoxy Coating for Ocean Front Environments

#### LENS OPTIONS

- FRO Frosted Opal
- RC Ribbed Clear
- RF Ribbed Frosted
- RW Ribbed White

#### MISC OPTIONS

- FUS Fuse and Fuseholder

#### EMERGENCY BATTERY OPTIONS

- Meets California Energy Commission Title 20 [CEC-400-2014-009-CMF] Efficiency Standards
- Cold Weather Batteries DO NOT meet CEC Standards
- Cold Weather Emergency Batteries Temp Range: -20°C thru 50°C
- Max Whip Length for REM Option is 8 Feet

- REM8W Remote 8 Watt LED
- REM10W Remote 10 Watt LED
- REM16W Remote 16 Watt LED
- REM10W- Remote 10 Watt LED - Cold Weather CW

#### ACCESSORY OPTIONS

Order As A Separate Line

- TPD Tamperproof Screwdriver

**\*NOTE:** Fixtures will ship from factory at lowest wattage and warmest CCT. It is the installer's responsibility to set the fixture at the desired wattage and CCT for their project.

### Product Specifications

**DIFFUSER:** Smooth Opal White Injection Molding Polycarbonate standard. Optional Frosted Opal Lens (FRO).

**DRIVER:** Universal Voltage 120/277v Electronic Driver with 0-10V dimming.

**EMERGENCY:** Optional Integral or Remote LED Emergency Battery

**FASTENERS:** (4) Stainless steel tamperproof Torx screws to secure lens to backplate.

**FINISH:** Extremely durable oven baked Polyester Powder Coat is Standard.

**GASKETING:** One Piece Die Cut 3/16" Thick Black EPDM.

**HOUSING:** Marine Grade cast aluminum.

**LIGHT ENGINE:** Energy Efficient Light Emitting Diode - Selectable Wattage/CCT.

**MOUNTING HOLES:** (4) 5/16" Diameter Holes for 1/4" Diameter Bolts.

**COMPLIANCE:** Built to comply with U.S. and Canadian Safety Standards. Buy American Act (BAA) and ADA Compliant. Suitable for Wet Locations.

**WARRANTY:** 5-Year Limited Warranty.



# The North American Collection

## “WISCONSIN” ROUND SHALLOW (Static Wattage/CCT Series)

Indoor/Outdoor — Vandal Wall Pack Family | Static Wattage / CCT (Non-Selectable) | ADA Compliant



Greenbay (GB)



Kenosha (KN)




Milwaukee (ML)



Hudson (HU)

### DIMENSIONS

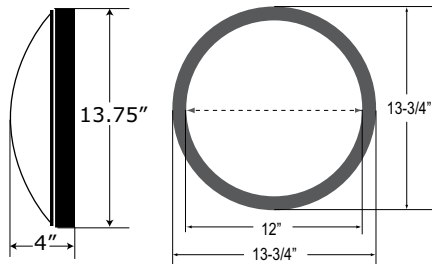

Catalog Number	
Project Name & Location	Type



### Product Specifications

**DIFFUSER:** Smooth Opal White Injection Molded Polycarbonate standard. Optional Frosted Opal Lens (FRO).

**DRIVER:** Universal Voltage 120/277v Electronic Driver with 0-10V dimming.

**EMERGENCY:** Optional Integral or Remote LED Emergency Battery

**FASTENERS:** (4) Stainless steel tamperproof Torx screws to secure lens to backplate.

**FINISH:** Extremely durable oven baked Polyester Powder Coat is Standard.

**GASKETING:** One Piece Die Cut 3/16" Thick Black EPDM.

**HOUSING:** Marine Grade cast aluminum.

**LIGHT ENGINE:** Energy Efficient Light Emitting Diode - Static Wattage/CCT (Non-Selectable).

**MOUNTING HOLES:** (4) 5/16" Diameter Holes for 1/4" Diameter Bolts.

**COMPLIANCE:** Built to comply with U.S. and Canadian Safety Standards. Buy American Act (BAA) and ADA Compliant. Suitable for Wet Locations.

**WARRANTY:** 5-Year Limited Warranty.

### order example:

**KN-4-LED25-CT4-UNV-BK-FRO-OCC**

#### SERIES

- GB Greenbay Series
- HU Hudson Series
- KN Kenosha Series
- ML Milwaukee Series

#### SIZES

- 4 13.75" Diameter Height x 4" Depth
- ADA Compliant
- Not for Use with Side Conduit Entry

#### LED WARRANTIES

LED25 \*25 Watt LED – Static Wattage (Non-Selectable)

#### LED COLOR TEMPERATURE (CCT)

- CT3 ±3000K LED Color Temp
- CT35 ±3500K LED Color Temp
- CT4 ±4000K LED Color Temp
- CT5 ±5000K LED Color Temp

#### VOLTAGES

- UNV 120–277 Universal Volt Driver

#### STANDARD FINISH

- BK Black
- WHT Textured White

#### PREMIUM UPCHARGE FINISH

Note: Premium Finishes Require MOQ = 5pcs

- BZ Bronze
- PA Painted Aluminum
- CC Custom Color (Visit [www.ralcolor.com](http://www.ralcolor.com))
- Provide RAL# or Make-to-Match Color Chip

#### INHIBITOR FINISH

Note: Inhibitor Finishes Require MOQ = 5pcs

- +NAT Epoxy Coating for Natatorium
- +OFC Epoxy Coating for Ocean Front Environments

#### LENS OPTIONS

- FRO Frosted Opal
- RC Ribbed Clear
- RF Ribbed Frosted
- RW Ribbed White

#### MISC OPTIONS

- FUS Fuse and Fuseholder

#### SENSOR CONTROL

Note: Motion Sensor Max Mounting Height 18-Feet

- OCC Occupancy Sensing / Motion Sensor Integral
- Microwave / Single Feed / 120/277 Only
- Stand-by Dimming Level Presets: ON/OFF

#### EMERGENCY BATTERY OPTIONS

- Meets California Energy Commission Title 20 [CEC-400-2014-009-CMF] Efficiency Standards
- Cold Weather Batteries DO NOT meet CEC Standards
- Cold Weather Emergency Batteries Temp Range: -20°C thru 50°C
- Max Whip Length for REM Option is 8 Feet

REM8W Remote 8 Watt LED

REM10W Remote 10 Watt LED

REM16W Remote 16 Watt LED

REM10W- Remote 10 Watt LED - Cold Weather CW

#### ACCESSORY OPTIONS

Order As A Separate Line

- TPD Tamperproof Screwdriver